

First Co.

CEILING ACCESS PANEL

CAP

Louvered or Non-Louvered

Heavy Gauge Galvanized Steel

Captive Screws

Surface Mount



CEILING ACCESS PANELS

FEATURES


- Louvered models available for bottom return air.
- Hinged panel is removable from frame and can be reversed for better clearance.
- Surface mount - does not have to perfectly match opening.
- No frame screws show after installation.
- Heavy gauge galvanized steel.
- Attractive baked on white epoxy coating can be latex painted in the field.
- Filter clips on 965, 966, and 967, accepts a 20 x 20 x 1 field-provided filter.
967-8 accepts 25 x 20 x 1 field-provided filter.
967-4 has a factory installed 10 x 65 x 1 filter (permanent).



LOUVERED
(965, 966, 967, 967-4, 967-6, 967-8)




SOLID
(965-1, 966-1, 967-1, 963-1, 964-1, 967-5, 967-7)

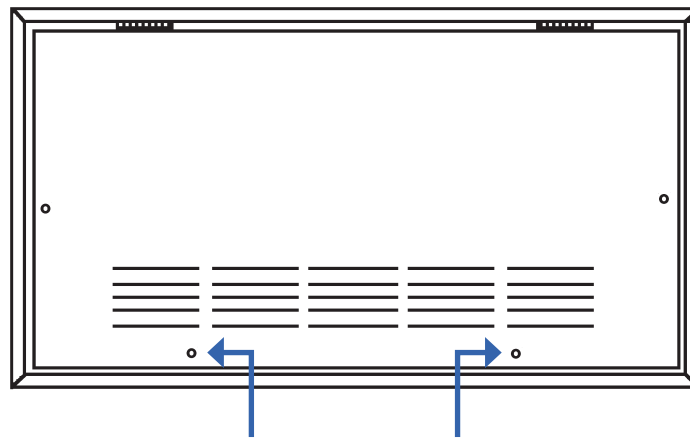

Captive screws now on all panels
(screws stay in panel when opened)


CEILING ACCESS PANELS

PHYSICAL DATA

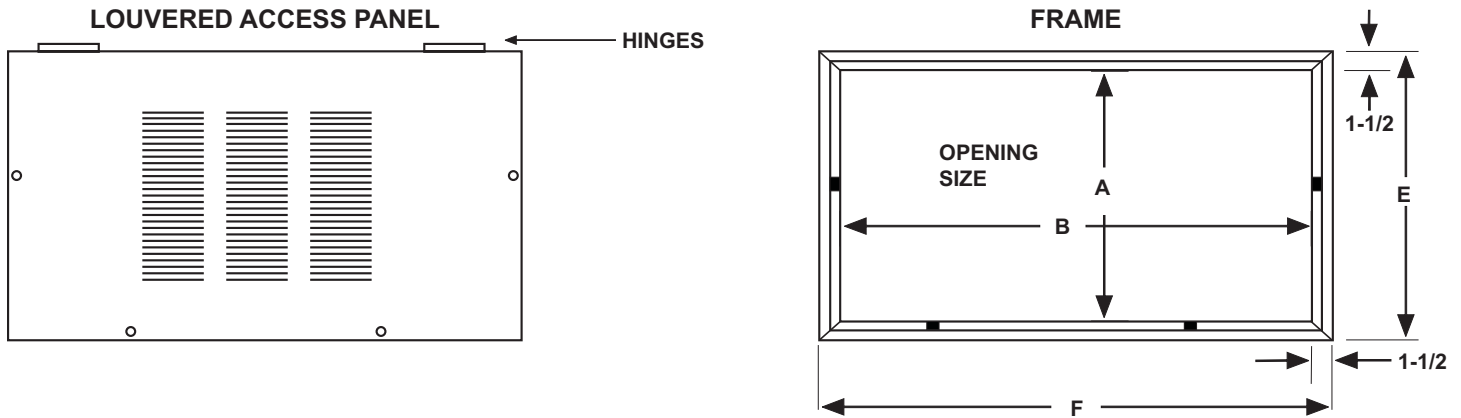

CAP – DIMENSIONS						
FOR FIRST CO. FAN COIL MODEL	DESCRIPTION (LOUVERED OR SOLID)	PANEL NUMBER	FRAME DIMENSIONS (OPENING)		FRAME DIMENSIONS (OUTSIDE)	
			A	B	E	F
18,19,24HX(C), 3-6HBC, 3-6PHBC, 3HH-8HH	LOUVERED SOLID	965 965-1	24-1/2	40	27-1/2	43
20,25,30HX(C), 18/19CDX-HW(C), 18/19CDXQ(C), 8HBC, 8PHBC, 10HH	LOUVERED SOLID	966 966-1	24-1/2	46	27-1/2	49
26,31,36HX(C), 24/25CDX-HW(C), 10HBC, 10PHBC, 12HH, 24/25CDXQ(C)	LOUVERED SOLID	967 967-1	24-1/2	52-1/2	27-1/2	55-1/2
30CDXQ, 36CDXQ, 13HBC, 13PHBC, 30CDX-HW, 36CDX-HW	LOUVERED SOLID	967-4 967-5	24-1/2	67	27-1/2	70
30CDX-HW-C, 30CDXQ-C 32,37HX(C)	LOUVERED SOLID	967-6 967-7	24-1/2	60	27-1/2	63
36/37CDX-HW-C, 36/37CDXQ-C	LOUVERED SOLID	967-8 967-5	24-1/2	67	27-1/2	70

ACCESS PANEL FRAME INSTALLATION DETAIL

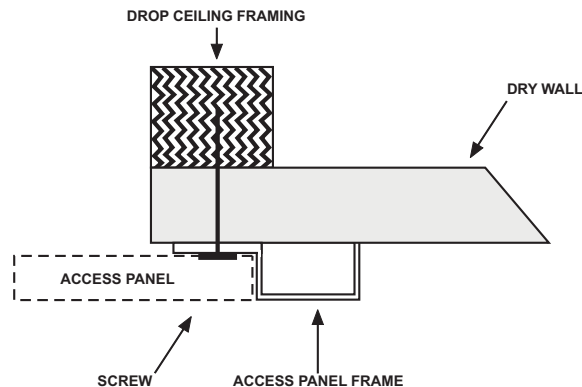



AMERICAN-MADE. FAMILY OWNED.



FIRST CO.
P.O. BOX 270969 - DALLAS, TEXAS 75227
PH. (214) 388-5751 | FAX (214) 388-2255
WWW.FIRSTCO.COM

SEPTEMBER 2025