



FIRST CO.

P.O. BOX 270969 - DALLAS, TEXAS 75227

PH. (214) 388-5751 | FAX (214) 388-2255

WWW.FIRSTCO.COM

HBC(X) Series

CHILLED WATER/ HOT WATER

2-PIPE/ 4-PIPE

HORIZONTAL 300-1200 CFM


► HBC PSC Motor Options

► HBCX ECM Motor Options


The ECM motor option includes 24V controls, a constant torque, permanent magnet, brushless DC motor, with 4 discrete speed taps that allow for high static applications and precise air balancing

HIGH EFFICIENCY


HIGH PERFORMANCE

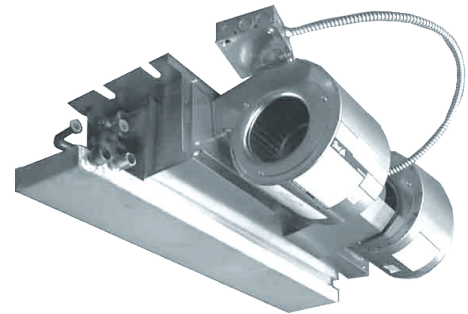


***HBC(X) Series**
Ceiling Concealed

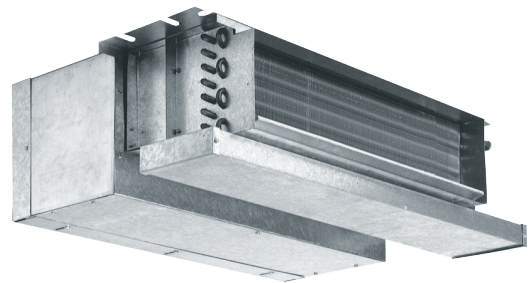

***PHBC(X) Series**
Ceiling Concealed with Plenum

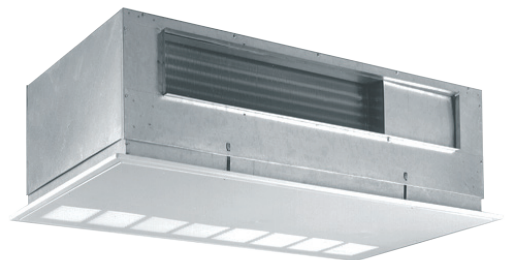

***RHBC(X) Series**
Ceiling Recessed

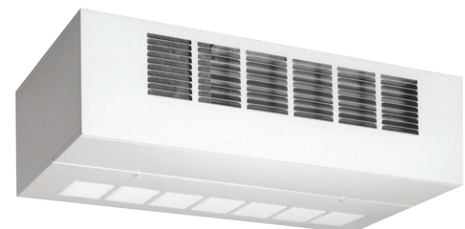

***CHBC(X) Series**
Ceiling Exposed




Table of Contents

SECTIONS	PAGE
Features	2-3
Nomenclature	4
Physical Data	5-8
Cooling Capacities	9-11
Heating Capacities	12
Correction Factors and Approved Ratings	13
Blower Performance PSC Motor	14-20
120/1/60	
HBC	14
PHBC (With Plenum)	15
RHBC (Recessed With Panel)	16
277/1/60	
HBC	17
PHBC (With Plenum)	18
RHBC (Recessed With Panel)	19
CHBC (Cabinet Exposed) - All Voltages	23
Blower Performance ECM Motor	21-25
120/1/60	
HBCX	21
PHBCX (With Plenum)	22
RHBCX (Recessed With Panel)	23
CHBCX (Cabinet Exposed)	24
HBCX-277 4-Row	25
Guide Specifications	26-27
Access Panels/ Filter	28
Accessories	29-31
Piping Package Options	32
Voltage Controls	33

NEW!

ECM MOTOR OPTION


This new ECM motor option includes 24V controls, a constant torque, permanent magnet, brushless DC motor, with 4 discrete speed taps that allow for precise air balancing.

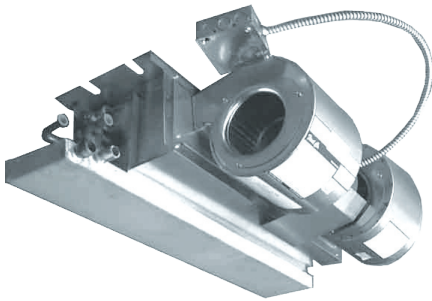

***HBC(X) SERIES**

CEILING CONCEALED


The *HBC series is designed for fully concealed applications. This 10" high space saving unit provides easy access for service and maintenance.

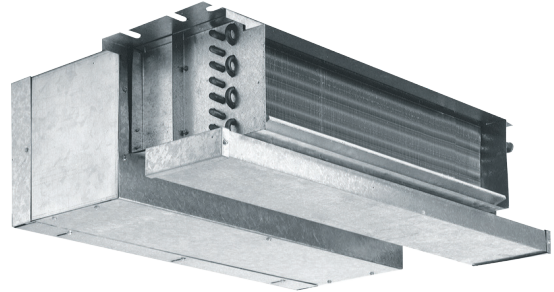

***PHBC(X) SERIES**

CEILING CONCEALED WITH PLENUM


The *HBC series is designed for fully concealed applications. This 10" high space saving unit provides easy access for service and maintenance.

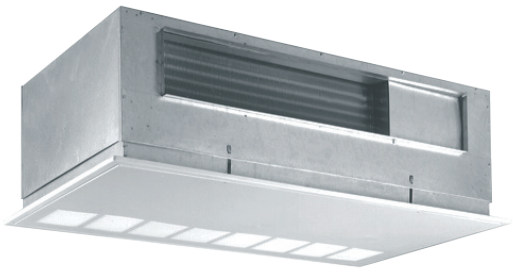

***RHBC(X) SERIES**

CEILING RECESSED

Includes adjustable hinged access/return panel with 1" TA fiberglass filter. The cabinet allows for a field mounted rear return duct connection by using a solid access panel.

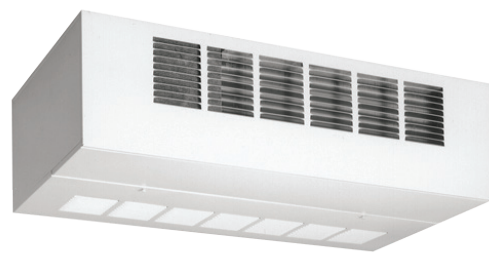

***CHBC(X) SERIES**

CEILING EXPOSED

Cabinet with an attractive baked powder finish. Cabinet includes stamped discharge opening and hinged bottom panel with 1" TA fiber glass filter.

(X) Denotes with ECM motor

STANDARD FEATURES

Basic Unit

All fan coils are manufactured with heavy gauge galvanized steel to resist corrosion. All models are approved for installation with "0" clearance to combustible material.

Insulation

Plenums and cabinets are insulated with Tuf-Skin dual density fiber glass blanket insulation with an anti-microbial agent.

Ceiling Panels

Hinged access/return panels are manufactured with heavy gauge galvanized steel with captive mounting screws and an attractive white baked powder finish.

Condensate Pans

Positive sloped drain pans are galvanized steel, coated on the inside surface with insulation. Pan includes both primary and secondary drain connections.

Return Air Plenums

Return air plenums are manufactured from galvanized steel insulated with dual density fiber glass blanket insulation and a 1" TA fiber glass filter.

Coils

Constructed with seamless copper tubes and headers. The tubes are mechanically expanded into corrugated aluminum fin material for a permanent primary to secondary surface bond. Coils are tested under water at 450 PSI for operation at 300 PSI. Coils include manual air vents.

Fan Wheels-Housing

The fan wheels are double width, double inlet (DWDI) forward curved, centrifugal type. Wheels are statically and dynamically balanced for smooth, quiet operation. The housing is constructed from heavy gauge galvanized steel with die-formed inlet cones.

Motors

Standard motors are PSC, permanently lubricated type with internal thermal overload protection.

Options


Factory mounted options include ECM motors stainless steel drain pans, foil faced cabinet insulation, Multi-24 3-speed 24V control, valve packages, thermostats, aqua stats, service switches. 120V, 208V/230V, 277V, 60hz



**MERV 8
Louvered Access Panels**
See page 29



MODEL NOMENCLATURE

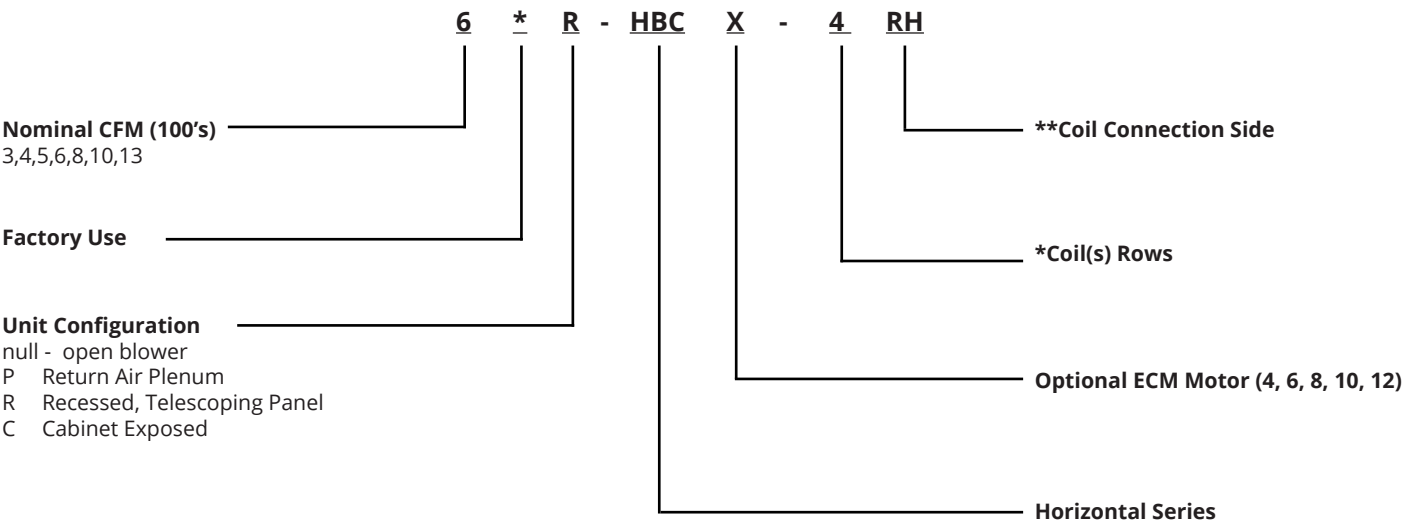

*Coil Configurations

Rows	Description
3	2-Pipe 3 Row
4	2-Pipe 4 Row
31	4-Pipe 3 Row Cooling, 1-Row Hot Water
32	4-Pipe 3 Row Cooling, 2-Row Hot Water
41	4-Pipe 4 Row Cooling, 1-Row Hot Water

**Coil Connection Side

RH Right Hand (default)
LH Left Hand
Hand connection is determined by looking with airflow

Available Voltage (PSC Motors)

120V/1/60
208-230V/1/60
277V/1/60



Available Voltage (ECM Motors)

120V/1/60
277V/1/60

In keeping with its policy of continuous progress and product improvement, First Co. reserves the right to make changes without notice. Maintenance for all First Co. products is available under "Product Maintenance" at www.firstco.com.

*HBC

PHYSICAL DATA

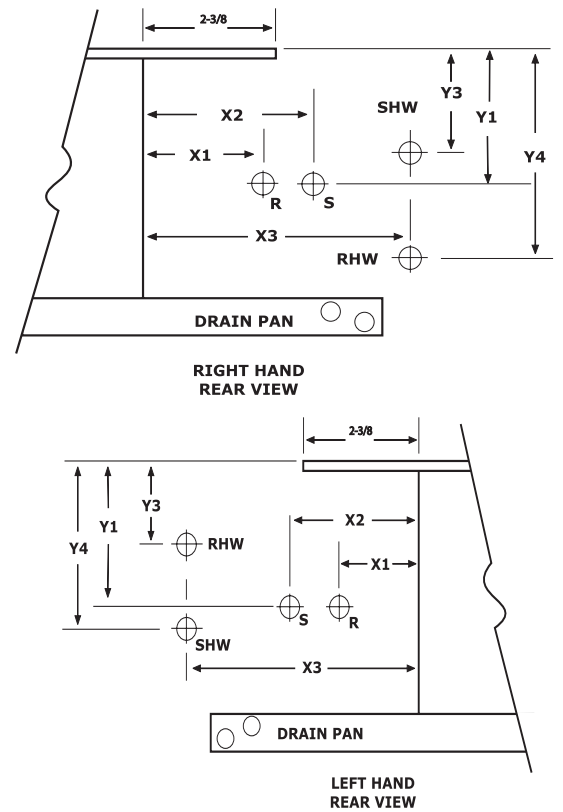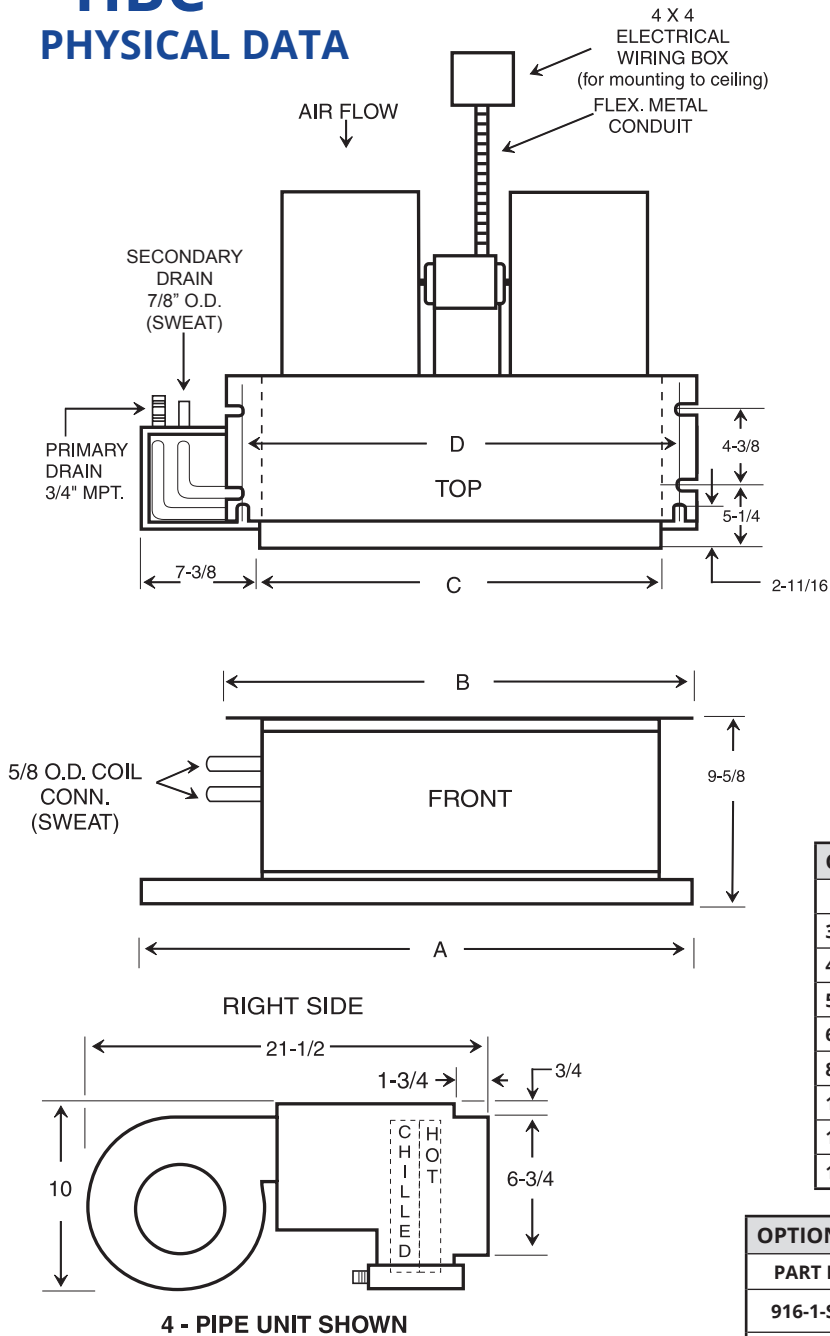

GENERAL DIMENSIONS				
MODEL	A	B	C	D
3*HBC	30-1/8	27-1/4	20-1/8	25-1/4
4*HBC(X)	36-1/8	33-1/4	26-1/8	31-1/4
5*HBC	40-1/8	37-1/4	30-1/8	35-1/4
6*HBC(X)	40-1/8	37-1/4	30-1/8	35-1/4
8*HBC(X)	46-1/8	43-1/4	36-1/8	41-1/4
10*HBC(X)	52-1/8	49-1/4	42-1/8	47-1/4
12*HBC(X)	59-1/8	56-1/4	49-1/8	54-1/4
13*HBC	59-1/8	56-1/4	49-1/8	54-1/4

OPTIONAL FIELD MOUNTED RETURN AIR PLENUM KITS			
PART NO	FOR MODEL NO.	DIMENSIONS (H X W X D)	SHIP WT.
916-1-STK	3*HBC	10 X 24 X 12-1/2	18
916-2-STK	4*HBC(X)	10 X 30 X 12-1/2	22
916-3-STK	5*HBC	10 X 34 X 12-1/2	22
916-3-STK	6*HBC(X)	10 X 34 X 12-1/2	22
916-4-STK	8*HBC(X)	10 X 40 X 12-1/2	24
916-5-STK	10*HBC(X)	10 X 46 X 12-1/2	27
916-6-STK	13*HBC	10 X 53 X 12-1/2	30

NOTES:



- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) RIGHT HAND UNIT SHOWN - LEFT HAND MODEL HAS DRAIN AND PIPING CONNECTIONS ON OPPOSITE SIDE OF THE FAN COIL. (HAND IS DETERMINED BY FACING THE BLOWER END)

HBC HEADER LOCATIONS							
RIGHT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	4-1/4	5	4	---	---	---
3/1 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
3/2 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
4 ROW	3	4-1/4	5	4	---	---	---
4/1 Split	3	4-1/4	5	4	8	4	6

HBC HEADER LOCATIONS							
LEFT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	3-3/4	5	4	---	---	---
3/1 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
3/2 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
4 ROW	3	3-3/4	5	4	---	---	---
4/1 Split	3	3-3/4	5	4	8	2	4

*PHBC


PHYSICAL DATA

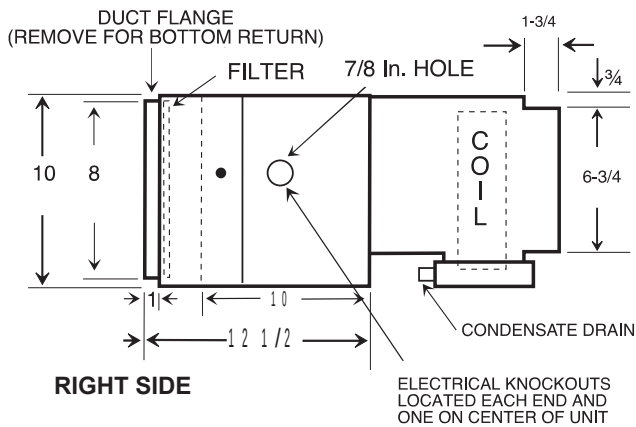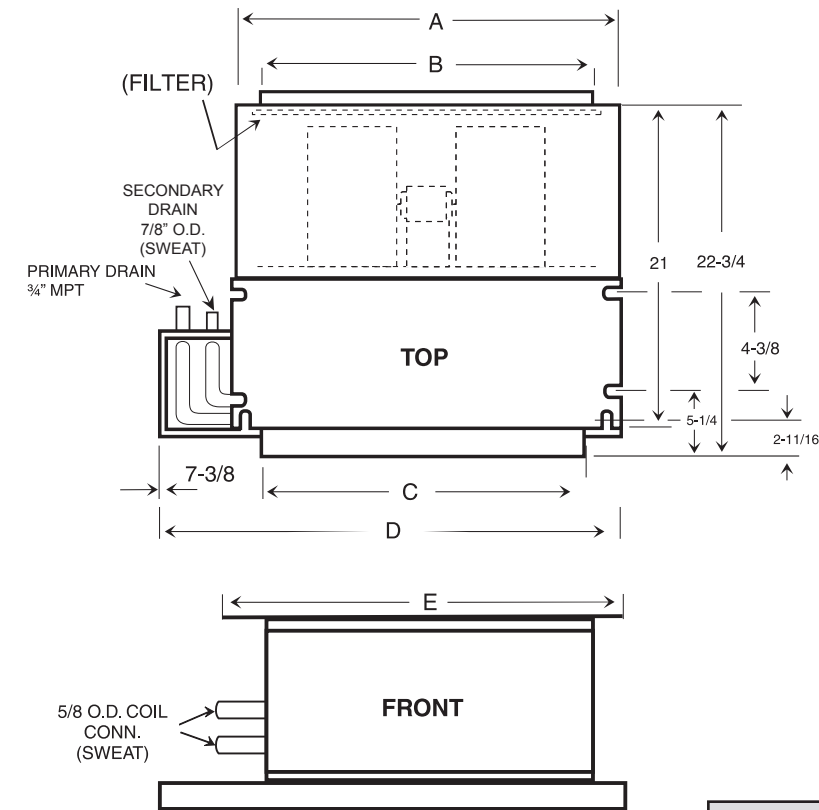

NOTES:

- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) RIGHT HAND UNIT SHOWN - LEFT HAND MODEL HAS DRAIN AND PIPING CONNECTIONS ON OPPOSITE SIDE OF THE FAN COIL. (HAND IS DETERMINED BY FACING THE BLOWER END)

PHBC HEADER LOCATIONS							
RIGHT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	4-1/4	5	4	---	---	---
3/1 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
3/2 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
4 ROW	3	4-1/4	5	4	---	---	---
4/1 Split	3	4-1/4	5	4	8	4	6

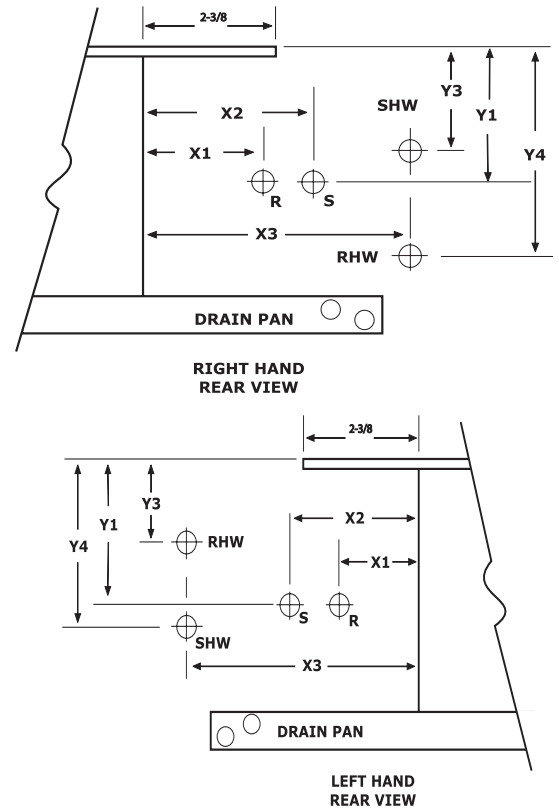

GENERAL DIMENSIONS

MODEL	A	B	C	D	E	FILTER SIZE (INCL.)	CONNECTIONS PRIMARY O.D.
3*PHBC	24	22	20-1/8	30-1/8	27-1/4	10 X 24	5/8"
4*PHBC(X)	30	28	26-1/8	36-1/8	33-1/4	10 X 30	
5*PHBC	34	32	30-1/8	40-1/8	37-1/4	10 X 34	
6*PHBC(X)	34	32	30-1/8	40-1/8	37-1/4	10 X 34	
8*PHBC(X)	40	38	36-1/8	46-1/8	43-1/4	10 X 40	
10*PHBC(X)	46	44	42-1/8	52-1/8	49-1/4	10 X 46	
12*PHBC(X)	53	51	49-1/8	59-1/8	56-1/4	10 X 53	
13*PHBC	53	51	49-1/8	59-1/8	56-1/4	10 X 53	

(X) - Available with ECM motor


NOTES:

1. Return plenums are insulated.
2. All plenums include throw-away filter.
3. Standard plenums are end return and can be field converted to bottom return.
4. Filter has separate access panel.

PHBC HEADER LOCATIONS							
LEFT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	3-3/4	5	4	---	---	---
3/1 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
3/2 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
4 ROW	3	3-3/4	5	4	---	---	---
4/1 Split	3	3-3/4	5	4	8	2	4

*RHBC

PHYSICAL DATA

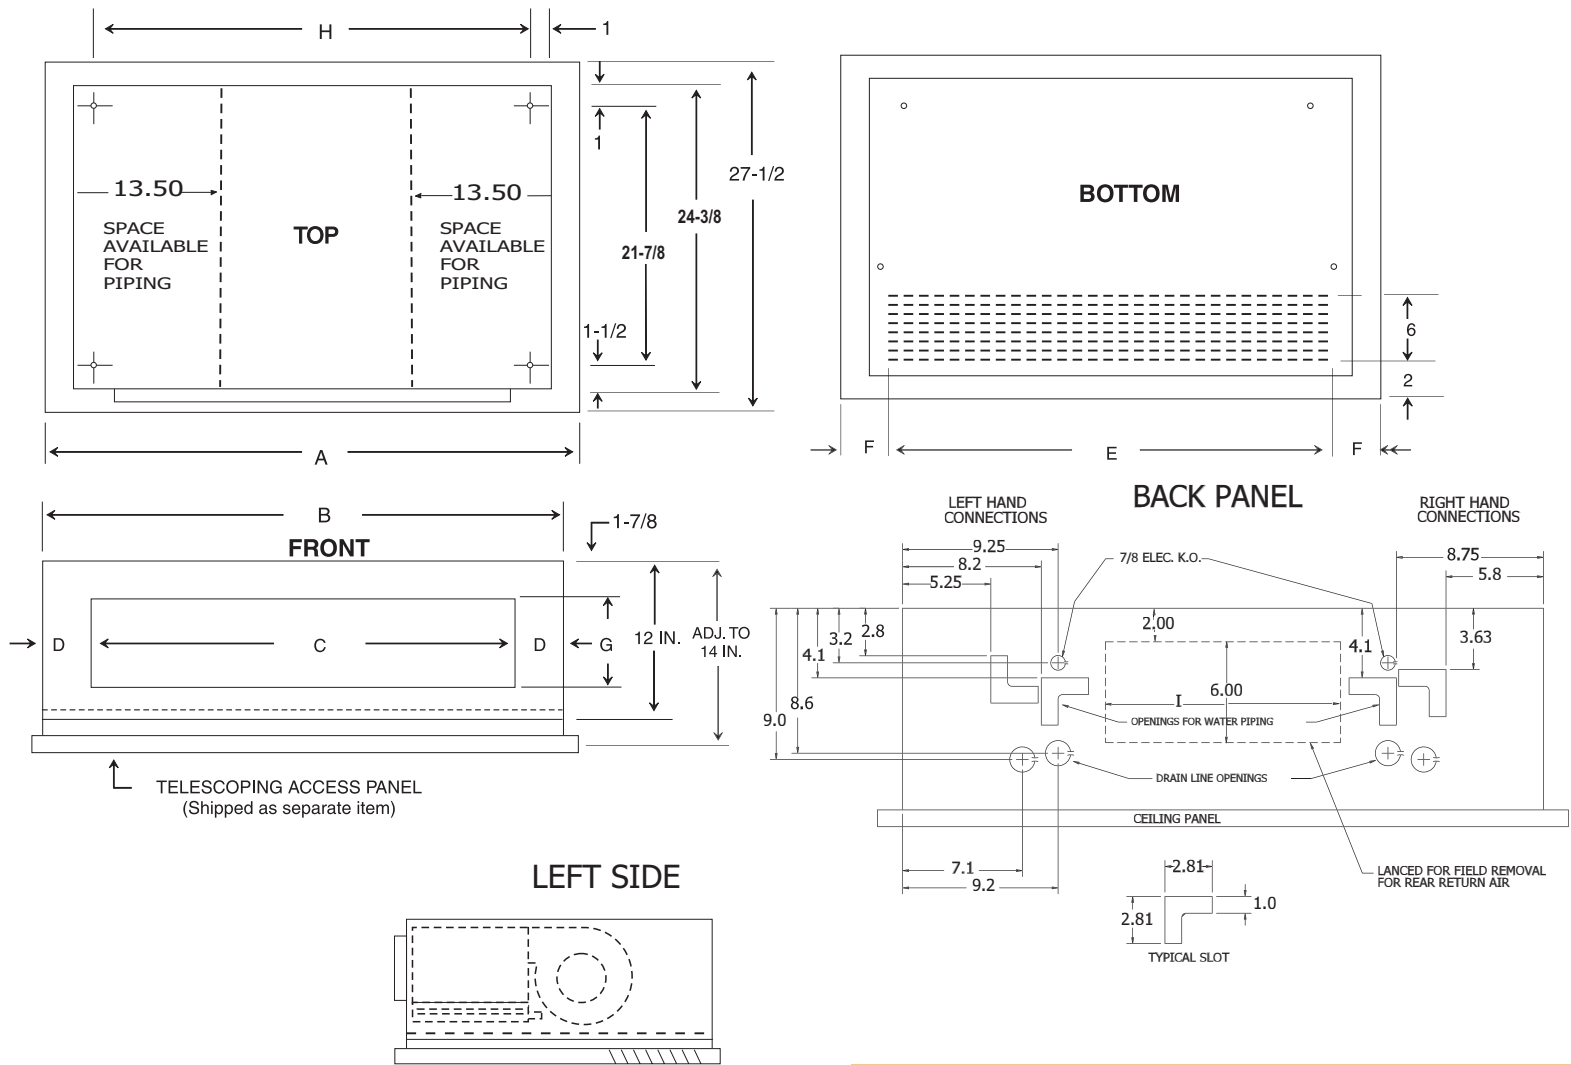

NOTES:

- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) LEFT HAND UNIT SHOWN, RIGHT HAND MIRROR IMAGE.
(HAND IS DETERMINED BY FACING THE BLOWER END)

NOTES:




1. Telescoping panel allows the cabinet to be installed to within 2 inches of the ceiling line. The adjustable panel frame ensures a flush installation.
2. Louvered access panel (bottom return) is standard. Specify solid panel if ducted rear return air is required.

GENERAL DIMENSIONS												
MODEL	A	B	C	D	E	F	G	H	I	TELESCOPING LOUVERED ACCESS PANEL	TELESCOPING SOLID ACCESS PANEL	FILTER SIZE (INCL)
3*RHBC	41	38-1/8	29	4-1/2	36-5/8	2-3/16	5-1/2	36	14	968-1	968-1S	10 X 37
4*RHBC(X)	47	44-1/8	35	4-1/2	42	2-1/2	5-1/2	42	20	968-2	968-2S	10 X 43
5*RHBC	51	48-1/8	39	4-1/2	47-1/4	1-7/8	5-1/2	46	24	968-3	968-3S	10 X 47.5
6*RHBC(X)	51	48-1/8	39	4-1/2	47-1/4	1-7/8	5-1/2	46	24	968-3	968-3S	10 X 47.5
8*RHBC(X)	57	54-1/8	45	4-1/2	52-1/2	2-1/4	5-1/2	52	30	968-4	968-4S	10 X 53
10*RHBC(X)	63	60-1/8	51	4-1/2	57-7/8	2-9/16	5-1/2	58	36	968-5	968-5S	10 X 59
12*RHBC(X)	70	67-1/8	58	4-1/2	63-1/8	3-7/16	5-1/2	65	42	968-6	968-6S	10 X 65
13*RHBC	70	67-1/8	58	4-1/2	63-1/8	3-7/16	5-1/2	65	42	968-6	968-6S	10 X 65

(X) - Available with ECM motor

*CHBC

PHYSICAL DATA

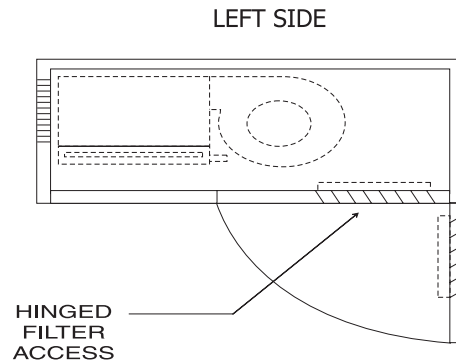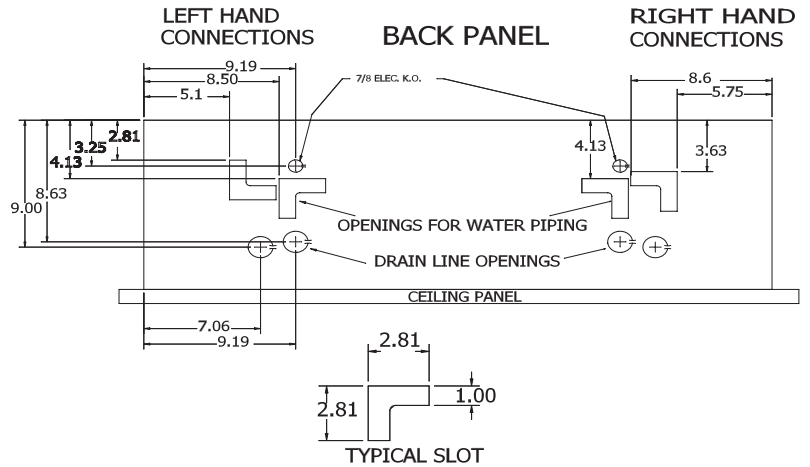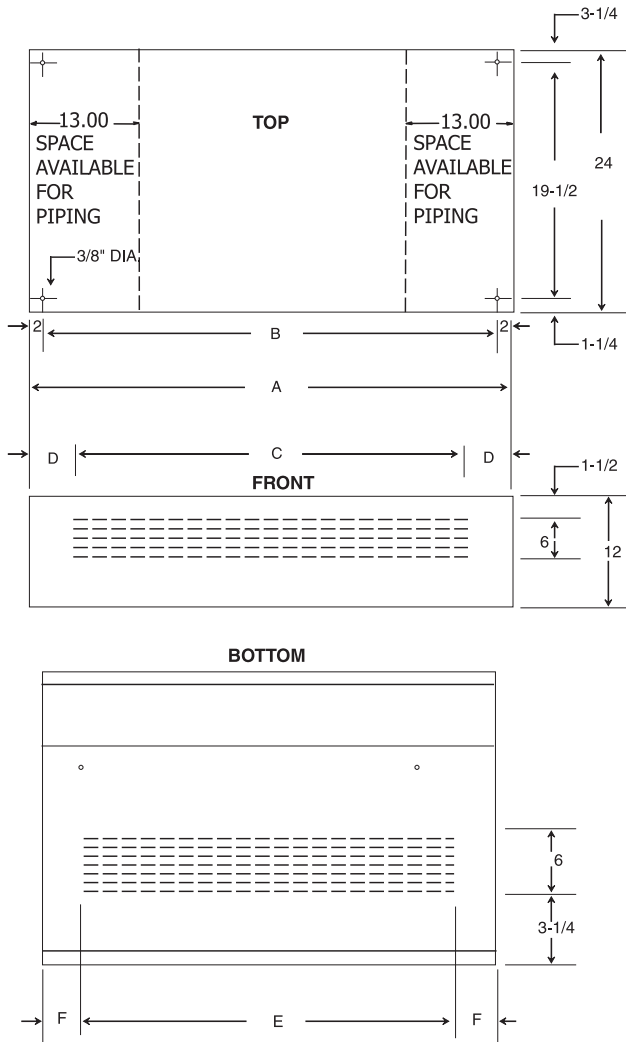

NOTES:

- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) LEFT HAND UNIT SHOWN, RIGHT HAND MIRROR IMAGE.
(HAND IS DETERMINED BY FACING THE BLOWER END)

NOTES:

1. Side panels are removable for easier valve access.

GENERAL DIMENSIONS								
MODEL	A	B	C	D	E	F	FILTER SIZE (INCL)	CONNECTIONS PRIMARY O.D.
3*CHBC	38	34	26	6	31-1/2	3-1/2	10 X 37	5/8"
4*CHBC(X)	44	40	31-1/2	6	37	3-1/2	10 X 43	
5*CHBC	48	44	37	5-1/2	42-1/2	3	10 X 46	
6*CHBC(X)	48	44	37	5-1/2	42-1/2	3	10 X 46	
8*CHBC(X)	54	50	42-1/2	6	48	3	10 X 53	
10*CHBC(X)	60	56	48	6	53	3-1/2	10 X 59	
12*CHBC(X)	67	63	53	7	58-1/2	4	10 X 65	
13*CHBC	67	63	53	7	58-1/2	4	10 X 65	

(X) - Available with ECM motor

COOLING CAPACITIES

*HBC-3

(3-Row Coil) All capacities are based on nominal CFM.

PSC MOTOR	COOLING CAPACITY (1000 BTUH)																	
	MODEL	NOMINAL CFM	45°F ENTERING WATER								42°F ENTERING WATER							
			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)		
					TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR
	3*HBC-3		300	3.0	12.6	10.8	7.4	7.2	8.3	6.5	5.5	3.0	12.6	11.8	7.8	7.9	9.0	6.8
2.5				9.0	10.4	7.3	8.3	8.0	6.3	6.4	2.5	9.0	11.4	7.6	9.1	8.7	6.6	6.9
2.0				6.0	9.9	7.1	9.9	7.5	6.2	7.5	2.0	6.0	10.8	7.4	10.8	8.2	6.4	8.2
1.5				3.6	9.0	6.7	12.1	6.9	5.9	9.2	1.5	3.6	9.9	7.1	13.1	7.5	6.2	10.0
4*HBC-3		400	3.0	14.7	13.8	9.6	9.2	10.6	8.4	7.0	3.0	14.7	15.1	10.2	10.1	11.5	8.8	7.7
			2.5	10.7	13.2	9.4	10.5	10.0	8.2	8.0	2.5	10.7	14.3	9.8	11.5	11.0	8.6	8.8
			2.0	7.2	12.3	9.1	12.3	9.4	8.0	9.4	2.0	7.2	13.4	9.5	13.4	10.2	8.3	10.2
			1.5	4.4	10.5	8.5	14.4	8.3	7.5	11.0	1.5	4.4	11.8	8.9	15.7	9.0	7.8	12.0
5*HBC-3		500	6.0	13.8	17.9	12.2	6.0	13.7	10.7	4.6	6.0	13.8	19.6	12.9	6.5	14.9	11.1	5.0
			5.0	9.8	17.3	12.0	6.9	13.2	10.5	5.3	5.0	9.8	18.9	12.6	7.5	14.4	10.9	5.8
			4.0	6.5	16.5	11.7	8.2	12.6	10.2	6.3	4.0	6.5	17.9	12.3	9.0	13.7	10.7	6.9
			3.0	3.8	15.0	11.3	10.0	11.5	9.8	7.7	3.0	3.8	16.4	11.7	10.9	12.5	10.2	8.3
6*HBC-3		600	6.0	13.8	20.6	14.1	6.9	15.7	12.3	5.2	6.0	13.8	22.4	14.8	7.5	17.1	12.9	5.7
			5.0	9.8	19.8	13.8	7.9	15.1	12.1	6.0	5.0	9.8	21.6	14.5	8.6	16.5	12.6	6.6
			4.0	6.5	18.7	13.4	9.4	14.3	11.8	7.2	4.0	6.5	20.4	14.1	10.2	15.6	12.3	7.8
			3.0	3.8	17.0	12.8	11.3	13.0	11.2	8.6	3.0	3.8	18.5	13.4	12.3	14.1	11.7	9.4
8*HBC-3		800	6.5	13.7	24.7	17.6	7.6	18.9	15.5	5.8	6.5	13.7	27.0	18.5	8.3	20.6	16.1	6.3
			5.5	10.0	23.7	17.3	8.6	18.1	15.1	6.6	5.5	10.0	25.8	18.1	9.4	19.7	15.8	7.2
			4.5	6.9	22.3	16.8	9.9	17.0	14.7	7.6	4.5	6.9	24.3	17.5	10.8	18.6	15.3	8.3
			3.5	4.3	20.1	16.0	11.5	15.4	14.1	8.8	3.5	4.3	21.9	16.6	12.5	16.7	14.6	9.6
10*HBC-3		1000	8.0	17.9	30.3	21.7	7.6	23.2	19.0	5.8	8.0	17.9	33.0	22.7	8.3	25.2	19.8	6.3
			7.0	13.7	29.2	21.3	8.4	22.3	18.7	6.4	7.0	13.7	31.9	22.3	9.1	24.3	19.4	7.0
			6.0	10.1	27.9	20.8	9.3	21.3	18.3	7.1	6.0	10.1	30.4	21.7	10.1	23.2	19.0	7.7
			5.0	7.0	26.2	20.1	10.5	20.0	17.8	8.0	5.0	7.0	28.5	21.0	11.4	21.8	18.5	8.7
13*HBC-3		1300	8.0	18.2	36.0	25.4	8.8	26.7	22.3	6.7	8.0	18.2	38.2	26.6	9.5	29.1	23.2	7.3
			7.0	14.1	33.6	24.9	9.6	25.7	21.9	7.3	7.0	14.1	36.7	26.0	10.5	28.0	22.8	8.0
			6.0	10.5	31.9	24.3	10.6	24.4	21.4	8.1	6.0	10.5	34.8	25.3	11.6	26.6	22.3	8.9
			5.0	7.4	29.7	23.5	11.9	22.7	20.8	9.1	5.0	7.4	32.4	24.4	12.9	24.7	21.5	9.9

*HBC-4

(4-Row Coil) All capacities are based on nominal CFM.

COOLING CAPACITY (1000 BTUH)																	
MODEL	NOMINAL CFM	45°F ENTERING WATER								42°F ENTERING WATER							
		GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)		
				TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR
3*HBC-4	300	2.5	11.4	11.5	7.8	9.2	8.8	6.8	7.0	2.5	11.4	12.5	8.2	10.0	9.6	7.1	7.7
		2.0	7.6	10.9	7.6	10.9	8.3	6.6	8.3	2.0	7.6	11.9	8.0	11.9	9.1	6.9	9.1
		1.5	4.5	10.0	7.2	13.3	7.6	6.3	10.1	1.5	4.5	10.9	7.6	14.5	8.3	6.6	11.1
		1.0	2.2	8.3	6.6	16.5	6.3	5.8	12.6	1.0	2.2	9.0	6.9	18.0	6.9	6.1	13.7
4*HBC-4	400	2.5	13.2	14.5	10.1	11.6	11.1	8.8	8.9	25	13.2	15.8	10.6	12.7	12.1	9.2	9.7
		2.0	8.9	13.5	9.7	13.5	10.3	8.5	10.3	2.0	8.9	14.7	10.2	14.7	11.3	8.9	11.3
		1.5	5.3	11.9	9.1	15.9	9.1	8.0	12.2	1.5	5.3	13.0	9.6	17.4	9.9	8.4	13.3
		1.2	3.6	10.5	8.6	17.5	8.0	7.6	17.1	1.2	3.6	11.5	9.0	19.1	8.8	7.9	14.6
5*HBC-4	500	3.5	6.5	17.5	12.4	10.0	13.4	10.8	7.7	3.5	6.5	19.1	13.3	10.9	14.6	11.3	8.3
		3.0	4.9	16.6	12.0	11.1	12.7	10.5	8.5	3.0	4.9	18.1	12.6	12.1	13.8	11.0	9.2
		2.5	3.5	15.4	11.6	12.3	11.8	10.2	9.4	2.5	3.5	16.8	12.1	13.5	12.9	10.6	10.3
		2.0	2.3	13.9	11.0	13.9	10.6	9.7	10.6	2.0	2.3	15.2	11.5	15.2	11.6	10.1	11.6
6*HBC-4	600	5.0	12.6	21.9	15.1	8.8	16.8	13.1	6.7	5.0	12.6	23.9	15.8	9.6	18.3	13.7	7.3
		4.0	8.3	20.8	14.6	10.4	15.9	12.7	7.9	4.0	5.3	22.6	15.3	11.3	17.3	13.3	8.6
		3.0	4.9	18.8	13.9	12.5	14.4	12.2	9.6	3.0	4.9	20.5	14.5	13.7	15.7	12.7	10.4
		2.0	2.3	15.6	12.7	15.6	11.9	11.2	11.9	2.0	2.3	17.0	13.2	17.0	13.0	11.6	13.0
8*HBC-4	800	6.0	14.7	27.0	19.1	9.0	20.6	16.7	6.9	6.0	14.7	29.4	20.0	9.8	22.5	17.4	7.5
		5.0	10.7	25.7	18.6	10.3	19.6	16.3	7.8	5.0	10.7	28.0	19.5	11.2	21.4	17.0	8.6
		4.0	7.2	23.7	17.8	11.9	18.1	15.7	7.2	4.0	7.2	25.9	18.6	12.9	19.7	16.3	9.9
		3.0	4.4	20.8	16.8	13.9	15.9	14.8	10.6	3.0	4.4	22.7	17.5	15.1	17.3	15.4	11.5
10*HBC-4	1000	7.0	14.1	32.6	23.3	9.3	24.9	20.4	7.1	7.0	14.1	35.5	24.4	10.2	27.1	21.3	7.8
		6.0	10.5	31.1	22.8	10.4	23.8	19.9	7.9	6.0	10.5	33.9	23.8	11.3	25.9	20.8	8.6
		5.0	7.4	29.2	22.0	11.7	22.3	19.4	8.9	5.0	7.4	31.8	23.0	12.7	24.3	20.1	9.7
		4.0	4.9	26.4	21.0	13.2	20.2	18.6	10.1	4.0	4.9	28.8	21.9	14.4	22.0	19.3	11.0
13*HBC-4	1300	7.0	16.1	37.5	27.3	10.7	28.7	23.9	8.2	7.0	16.1	40.9	28.6	11.7	31.2	24.9	8.9
		6.0	12.0	35.7	26.6	11.9	27.2	23.4	9.1	6.0	12.0	38.9	27.8	13.0	29.7	24.3	9.9
		5.0	8.5	33.1	25.7	13.3	25.3	22.6	10.1	5.0	8.5	36.1	26.8	14.4	27.6	23.5	11.0
		4.0	5.6	29.7	24.4	14.8	24.6	24.6	12.3	4.0	5.6	22.3	25.4	16.2	24.7	22.4	12.4

COOLING CAPACITIES

*HBC-31

(3-Row Coil) All capacities are based on nominal CFM.

PSC MOTOR	COOLING CAPACITY (1000 BTUH)																		
	MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER							
			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			
					TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR	
3*HBC-31	300	3.0	12.6	10.4	7.1	6.9	7.9	6.2	5..	3.0	12.6	11.3	7.5	7.5	8.6	6.5	5.8		
		2.5	9.0	10.0	7.0	8.0	7.6	6.1	6.1	2.5	9.0	10.9	7.3	8.7	8.3	6.3	6.6		
		2.0	6.0	9.4	6.8	9.4	7.2	5.9	7.2	2.0	6.0	10.	7.1	10.3	7.9	6.2	7.9		
		1.5	3.6	8.6	6.5	11.5	6.6	5.7	8.8	1.5	3.6	9.4	6.7	12.6	1.2	5.9	9.6		
4*HBC-31	400	3.0	14.7	13.2	9.2	8.8	10.1	8.0	6.7	3.0	14.7	14.4	9.7	9.6	11.0	8.4	7.3		
		2.5	10.7	12.6	9.0	10.0	9.6	7.9	7.7	2.5	10.7	13.7	9.4	11.0	10.5	8.2	8.4		
		2.0	7.2	11.7	8.7	11.7	8.9	7.6	8.9	2.0	7.2	12.8	9.1	12.8	9.7	7.9	9.7		
		1.5	4.4	10.3	8.2	13.8	7.9	7.2	10.5	1.5	4.4	11.3	8.5	15.0	8.6	7.5	11.5		
5*HBC-31	500	6.0	13.8	17.1	11.7	5.7	13.0	10.2	4.3	6.0	13.8	18.6	12.3	6.2	14.2	10.6	4.7		
		5.0	9.8	16.5	11.5	6.6	12.6	10.0	5.0	5.0	9.8	18.0	12.0	7.2	13.7	10.4	5.5		
		4.0	6.5	15.7	11.2	7.8	12.0	9.8	6.0	4.0	6.5	17.1	11.7	8.5	13.1	10.2	6.5		
		3.0	3.8	14.3	10.7	9.5	10.9	9.4	7.3	3.0	3.8	15.6	11.1	10.4	11.9	9.7	.0		
6*HBC-31	600	6.0	13.8	19.5	13.4	6.5	14.9	11.7	5.0	6.0	13.8	21.3	14.1	7.1	16.2	12.3	5.4		
		5.0	9.8	18.8	13.2	7.5	14.3	11.5	5.7	5.0	9.8	20.5	13.8	8.2	15.6	12.0	6.2		
		4.0	6.5	17.8	12.8	8.9	13.6	11.2	6.8	4.0	6.5	19.4	13.4	9.7	14.8	11.7	7.4		
		3.0	3.8	16.1	12.2	10.7	12.3	10.7	8.2	3.0	3.8	17.5	12.7	11.7	13.4	11.2	8.9		
8*HBC-31	800	6.5	13.7	23.4	16.8	7.2	17.9	14.7	5.5	6.5	13.7	25.5	17.6	7.9	19.5	15.3	6.0		
		5.5	10.0	22.4	16.4	8.2	17.1	14.4	6.2	5.5	10.0	24.5	17.2	8.9	18.7	15.0	6.8		
		4.5	6.9	21.1	15.9	9.4	16.1	14.0	7.2	4.5	6.9	23.0	16.6	10.2	17.6	14.6	7.8		
		3.5	4.3	29.1	15.2	10.9	14.6	13.4	8.3	3.5	4.3	20.8	15.8	11.9	15.9	13.9	9.1		
10*HBC-31	1000	8.0	17.9	28.7	20.6	7.2	21.9	18.1	5.5	8.0	17.9	31.3	21.6	7.8	23.9	18.8	6.0		
		7.0	13.7	27.7	20.2	7.9	21.1	17.8	6.0	7.0	13.7	30.2	21.1	8.6	23.0	15.8	6.6		
		6.0	10.1	26.4	19.8	8.8	20.2	17.4	6.7	6.0	10.1	28.8	20.6	9.6	22.0	18.1	7.3		
		5.0	7.0	24.8	19.2	9.9	18.9	16.9	7.6	5.0	7.0	27.0	20.0	10.8	20.6	17.6	8.2		
13*HBC-31	1300	8.0	18.2	33.1	24.4	8.3	25.3	21.2	6.3	8.0	18.2	36.1	25.3	9.0	27.6	22.1	6.9		
		7.0	14.1	31.8	23.7	9.1	24.3	20.9	6.9	7.0	14.1	34.7	24.7	9.9	26.5	21.7	7.6		
		6.0	10.5	30.2	23.1	10.1	23.1	20.4	7.7	6.0	10.5	33.0	24.1	11.0	25.2	21.2	8.4		
		5.0	7.4	28.1	22.3	11.2	21.5	19.8	8.6	5.0	7.4	30.6	23.2	12.3	23.4	20.5	9.4		

*HBC-32

(4-Row Coil) All capacities are based on nominal CFM.

PSC MOTOR	COOLING CAPACITY (1000 BTUH)																	
	MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER						
			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)		
					TH	SH	TR	TH	SH	TR			TH	SH	TR			
3*HBC-32	300	3.0	12.6	9.6	6.5	6.4	7.3	5.7	4.9	3.0	12.6	10.5	6.9	7.0	8.0	6.0	5.3	
		2.5	9.0	9.3	6.4	7.4	7.1	5.6	5.7	2.5	9.0	10.1	6.7	8.1	7.7	5.8	6.2	
		2.0	6.0	8.8	6.2	8.8	6.7	5.4	6.7	2.0	6.0	9.6	6.5	9.6	7.3	5.7	7.3	
		1.5	3.6	8.0	5.9	10.7	6.1	5.2	8.2	1.5	3.6	8.7	6.2	11.7	6.7	5.4	8.9	
4*HBC-32	400	3.0	14.7	12.2	8.5	8.2	9.4	7.4	6.2	3.0	14.7	13.4	8.9	8.9	10.2	7.7	6.8	
		2.5	10.7	11.7	8.2	9.3	8.9	7.2	7.1	2.5	10.7	12.7	8.6	10.2	9.7	7.5	7.8	
		2.0	7.2	10.9	8.0	10.9	8.3	7.0	8.3	2.0	7.2	11.9	8.3	11.9	9.1	7.3	9.1	
		1.5	4.4	9.6	7.5	12.8	7.3	6.6	9.8	1.5	4.4	10.5	7.8	14.0	8.0	6.9	10.7	
5*HBC-32	500	6.0	13.8	15.9	10.7	5.3	12.1	9.4	4.0	6.0	13.8	17.3	11.3	5.8	13.2	9.8	4.4	
		5.0	9.8	15.3	10.5	6.1	11.7	9.2	4.7	5.0	9.8	16.7	11.0	6.7	12.8	9.6	5.1	
		4.0	6.5	14.6	10.2	7.3	11.1	9.0	5.6	4.0	6.5	15.9	10.7	7.9	12.1	9.4	6.1	
		3.0	3.8	13.3	9.8	8.9	10.2	8.6	6.8	3.0	3.8	14.5	10.2	9.7	11.1	8.9	7.4	
6*HBC-32	600	6.0	13.8	18.2	12.3	6.1	13.9	10.7	5.1	6.0	13.8	19.8	12.9	6.6	15.2	11.2	5.1	
		5.0	9.8	17.5	12.0	7.0	13.4	10.5	5.8	5.0	9.8	19.1	12.6	7.6	14.6	11.0	5.8	
		4.0	6.5	16.6	11.7	8.3	12.6	10.3	6.7	4.0	6.5	18.1	12.2	9.0	13.8	10.7	6.9	
		3.0	3.8	15.0	11.1	10.0	11.5	9.8	7.8	3.0	3.8	16.4	11.6	10.9	12.5	10.2	8.3	
8*HBC-32	800	6.5	13.7	21.9	15.3	7.2	16.7	13.4	5.1	6.5	13.7	23.8	16.0	7.3	18.2	14.0	5.6	
		5.5	10.0	20.9	14.9	7.6	16.0	13.1	5.8	5.5	10.0	22.8	15.6	8.3	17.4	13.7	6.3	
		4.5	6.9	19.7	14.5	8.8	15.1	12.8	6.7	4.5	6.9	21.5	15.1	9.6	16.4	13.3	7.3	
		3.5	4.3	17.8	13.8	10.2	13.6	12.2	7.8	3.5	4.3	19.4	14.4	11.1	14.8	12.7	8.5	
10*HBC-32	1000	8.0	17.9	26.8	18.7	6.7	20.5	16.4	5.1	8.0	17.9	29.2	19.6	7.3	22.3	17.1	5.6	
		7.0	13.7	25.8	18.3	7.4	19.7	16.1	5.8	7.0	13.7	28.2	19.2	8.0	21.5	16.8	6.1	
		6.0	10.1	24.7	17.9	8.2	18.8	15.8	6.7	6.0	10.1	26.9	18.7	9.0	20.5	16.4	6.8	
		5.0	7.0	23.1	17.4	9.2	17.6	15.3	7.1	5.0	7.0	25.2	18.1	10.1	19.2	15.9	7.7	
13*HBC-32	1300	8.0	18.2	30.9	21.9	7.7	23.6	19.2	5.9	8.0	18.2	33.7	22.9	8.4	25.8	20.	6.4	
		7.0	14.1	29.7	21.4	8.5	22.7	18.9	6.5	7.0	14.1	32.4	22.4	9.3	24.7	19.7	7.1	
		6.0	10.5	28.2	20.9	9.4	21.6	18.5	7.2	6.0	10.5	30.8	21.8	10.3	23.5	19.2	7.8	
		5.0	7.4	26.2	20.2	10.5	20.0	17.9	8.0	5.0	7.4	28.6	21.0	11.4	21.8	18.6	8.7	

COOLING CAPACITIES

*HBC-41

(4-Row Coil) All capacities are based on nominal CFM.

PSC MOTOR	COOLING CAPACITY (1000 BTUH)																	
	MODEL	NOMINAL CFM	45°F ENTERING WATER								42°F ENTERING WATER							
			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)		
					TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR
3*HBC-41	300	3.0	15.9	11.2	7.5	7.5	8.6	6.5	5.7	3.0	15.9	12.3	7.9	8.2	9.4	6.8	6.2	
		2.5	11.4	10.8	7.4	8.7	8.3	6.4	6.6	2.5	11.4	11.8	7.7	9.4	9.0	6.7	7.2	
		2.0	7.6	10.2	7.1	10.2	7.8	6.2	7.8	2.0	7.6	11.2	7.5	11.2	8.5	6.5	8.5	
		1.5	4.5	9.4	6.8	12.5	7.2	6.0	9.5	1.5	4.5	10.2	7.1	13.6	7.8	6.2	10.4	
4*HBC-41	400	3.0	18.2	14.3	9.8	9.6	10.9	8.5	7.3	3.0	18.2	15.6	10.3	10.4	11.9	8.9	8.0	
		2.5	13.2	13.6	9.5	10.9	10.4	8.3	8.3	2.5	13.2	14.9	10.0	11.9	11.4	8.7	9.1	
		2.0	8.9	12.7	9.2	12.7	9.7	8.0	9.7	2.0	8.9	13.9	9.6	13.9	10.6	8.4	10.6	
		1.5	5.3	11.2	8.6	15.0	8.6	7.6	11.4	1.5	5.3	12.2	9.0	16.3	9.4	7.9	12.5	
5*HBC-41	500	6.0	17.6	18.9	12.6	6.3	14.5	10.9	4.8	6.0	17.6	20.6	13.3	6.9	15.8	11.5	5.3	
		5.0	12.6	18.3	12.3	7.3	14.0	10.7	5.6	5.0	12.6	19.9	13.0	8.0	15.2	11.2	6.1	
		4.0	8.3	17.4	12.0	8.7	13.3	10.5	6.6	4.0	8.3	19.0	12.6	9.5	14.5	10.9	7.2	
		3.0	4.9	15.9	11.4	10.6	12.1	10.0	8.1	3.0	4.9	17.3	12.0	11.5	13.2	10.4	8.8	
6*HBC-41	600	6.0	17.6	21.5	14.4	7.2	16.4	12.6	5.5	6.0	17.6	23.5	15.2	7.8	17.9	13.1	6.0	
		5.0	12.6	20.7	14.1	8.3	15.8	12.3	6.3	5.0	12.6	22.6	14.8	9.0	17.2	12.9	6.9	
		4.0	8.3	19.6	13.7	9.8	15.0	12.0	7.5	4.0	8.3	21.3	14.4	10.7	16.3	12.5	8.2	
		3.0	4.9	17.7	13.0	11.8	13.6	11.4	9.0	3.0	4.9	19.3	13.6	12.9	14.8	11.9	9.8	
8*HBC-41	800	6.5	16.9	26.0	18.1	8.0	19.6	15.8	6.1	6.5	16.9	28.3	19.0	8.7	21.6	16.5	6.7	
		5.5	12.6	24.9	17.7	9.1	19.0	15.5	6.9	5.5	12.6	27.1	18.5	9.9	20.7	16.1	7.5	
		4.5	8.9	23.4	17.1	10.4	17.9	15.0	8.0	4.5	8.9	25.6	17.9	11.4	19.5	16.7	8.7	
		3.5	5.7	21.1	16.3	12.1	16.1	14.4	9.2	3.5	5.7	23.0	17.0	13.2	17.6	14.9	10.1	
10*HBC-41	1000	8.0	18.2	31.9	22.3	8.0	24.4	19.5	6.1	8.0	18.2	34.8	23.3	8.7	26.6	20.3	6.6	
		7.0	14.1	30.8	21.8	8.8	23.5	19.1	6.7	7.0	14.1	33.6	22.9	9.6	25.7	19.9	7.3	
		6.0	10.5	29.4	21.3	9.8	22.5	18.7	7.5	6.0	10.5	32.1	22.3	10.7	24.5	19.5	8.2	
		5.0	7.4	27.6	20.6	11.0	21.1	18.2	8.4	5.0	7.4	20.0	21.6	12.0	22.9	18.9	9.2	
13*HBC-41	1300	8.0	20.8	37.0	26.1	9.2	28.2	22.9	7.1	8.0	20.8	40.3	27.4	10.1	30.8	23.9	7.7	
		7.0	16.1	35.5	25.6	10.1	27.1	22.4	7.7	7.0	16.1	38.7	26.8	11.1	29.6	23.4	8.4	
		6.0	12.0	33.7	24.9	11.2	25.8	21.9	8.6	6.0	12.0	36.8	26.1	12.3	28.1	22.8	9.4	
		5.0	8.5	31.3	24.1	12.5	23.9	21.2	9.6	5.0	8.5	34.2	25.1	13.7	26.1	22.0	10.4	

HEATING CAPACITIES

*HBC-3 3-Row Coil

PSC MOTOR	HEATING CAPACITY (1000 BTUH)							
	MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
					180°F	160°F	140°F	120°F
	3*HBC-3	300	3.0	12.6	26.9	22.0	17.1	12.2
			2.0	3.0	26.0	21.2	16.5	11.8
			1.0	1.7	23.4	19.1	14.9	10.6
	4*HBC-3	400	3.5	19.3	35.8	29.3	22.8	16.3
			2.5	10.7	34.6	28.3	22.0	15.7
			1.5	4.4	32.1	26.3	20.4	14.6
	5*HBC-3	500	5.0	9.8	43.7	35.7	27.8	19.8
			3.5	5.1	42.2	34.5	26.8	19.2
			2.0	1.8	38.6	31.6	24.6	17.5
	6*HBC-3	600	5.0	9.8	49.7	40.6	31.6	22.6
			3.5	5.1	47.8	39.1	30.4	21.7
			2.0	1.8	43.5	35.6	27.7	19.8
	8*HBC-3	800	7.0	15.7	65.0	53.2	41.4	29.6
			5.0	8.4	62.7	51.3	39.9	28.5
			3.0	3.2	57.7	47.2	39.7	26.2
	10*HBC-3	1000	8.0	17.9	79.2	64.8	50.4	36.0
			6.0	10.1	76.6	62.7	48.8	34.8
			4.0	4.5	71.9	58.8	45.7	32.7
	13*HBC-3	1300	8.0	18.2	93.3	76.4	59.4	42.4
			6.0	10.5	90.0	73.6	57.2	40.9
			4.0	4.9	83.8	68.6	53.3	38.1

*HBC-31 1-Row Coil

PSC MOTOR	HEATING CAPACITY (1000 BTUH)							
	MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
					180°F	160°F	140°F	120°F
	3*HBC-31	300	2.0	11.3	15.2	12.4	9.6	6.9
			1.5	6.7	14.7	12.0	9.4	6.7
			1.0	3.2	13.9	11.4	8.8	6.3
	4*HBC-31	400	2.0	14.4	19.6	16.1	12.5	8.9
			1.5	8.9	18.9	15.5	12.0	8.6
			1.0	4.5	17.5	14.4	11.2	8.0
	5*HBC-31	500	2.0	15.0	23.3	19.1	14.8	10.6
			1.5	9.0	22.3	18.2	14.2	10.1
			1.0	4.4	20.4	16.7	13.0	9.3
	6*HBC-31	600	2.0	15.0	25.7	21.0	16.4	11.7
			1.5	9.0	24.5	20.0	15.6	11.1
			1.0	4.4	22.4	18.3	14.2	10.2
	8*HBC-31	800	2.0	18.8	31.6	25.9	20.1	14.4
			1.5	11.3	29.8	24.4	19.0	13.6
			1.0	5.5	26.8	21.9	17.0	12.2
	10*HBC-31	1000	2.0	19.9	37.0	30.3	23.5	16.8
			1.5	12.3	34.6	28.3	22.0	15.7
			1.0	6.2	30.8	25.2	19.6	14.0
	13A*HBC-31	1300	2.0	23.4	42.3	34.6	26.9	19.2
			1.5	14.0	39.4	32.2	25.1	17.9
			1.0	6.8	35.2	28.8	22.4	16.0

*HBC-4 4-Row Coil

PSC MOTOR	HEATING CAPACITY (1000 BTUH)							
	MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
					180°F	160°F	140°F	120°F
	3*HBC-4	300	3.0	15.9	28.6	23.4	18.2	13.0
			2.0	7.6	27.6	22.6	17.6	12.6
			1.0	2.2	14.9	20.3	15.8	11.3
	4*HBC-4	400	3.0	18.2	37.6	30.7	23.9	17.1
			2.0	8.9	35.8	29.3	22.8	16.3
			1.0	2.6	31.3	25.6	19.9	14.2
	5*HBC-4	500	4.0	8.3	45.6	37.3	29.0	20.7
			3.0	4.9	44.0	36.0	28.0	20.0
			2.0	2.3	41.2	33.7	26.2	18.7
	6*HBC-4	600	5.0	12.6	53.2	43.5	33.9	24.2
			4.0	8.3	52.0	42.6	33.1	23.6
			3.0	4.9	50.1	41.0	31.9	22.8
	8*HBC-4	800	6.0	14.7	68.8	56.3	43.8	31.3
			4.5	8.9	66.4	54.3	42.3	30.2
			3.0	4.4	62.0	50.7	39.4	28.2
	10*HBC-4	1000	7.5	16.1	84.7	69.3	53.9	38.5
			6.0	10.5	82.5	67.5	52.5	37.5
			4.5	4.5	79.0	64.6	50.3	35.9
	13*HBC-4	1300	8.0	20.8	100.5	92.2	63.9	45.7
			6.5	14.0	97.9	80.1	62.3	44.5
			5.0	8.5	94.1	77.0	69.9	42.8

*HBC-32 2-Row Coil

PSC MOTOR	HEATING CAPACITY (1000 BTUH)							
	MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
					180°F	160°F	140°F	120°F
	3*HBC-32	300	3.0	10.5	18.3	15.0	11.7	8.3
			2.0	5.1	17.7	14.5	11.2	8.0
			1.0	1.5	15.9	13.0	10.1	7.2
	4*HBC-32	400	3.0	11.2	24.0	19.6	15.2	10.9
			2.0	5.4	22.8	18.7	14.5	10.4
			1.0	1.6	20.0	16.4	12.7	9.1
	5*HBC-32	500	3.0	13.4	28.8	23.5	18.3	13.1
			2.0	6.4	27.2	22.3	17.3	12.4
			1.0	1.9	23.4	19.1	14.9	10.6
	6*HBC-32	600	3.0	13.4	32.1	26.2	20.4	14.6
			2.0	6.4	30.3	24.8	19.3	13.8
			1.0	1.9	25.8	21.1	16.4	11.7
	8*HBC-32	800	4.0	8.4	40.5	33.1	25.8	18.4
			3.0	4.8	38.6	31.6	24.6	17.5
			2.0	2.2	35.4	28.9	22.5	16.1
	10*HBC-32	1000	4.0	8.1	48.2	39.5	30.7	21.9
			3.0	4.7	45.7	37.4	29.1	20.8
			2.0	2.2	41.3	33.8	26.3	18.8
	13*HBC-32	1300	4.0	7.8	56.1	45.9	35.7	25.5
			3.0	4.3	52.8	43.2	33.6	24.0
			2.0	1.9	47.3	38.7	30.1	21.5

*HBC-41 1-Row Coil

PSC MOTOR	HEATING CAPACITY (1000 BTUH)							
	MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
					180°F	160°F	140°F	120°F
	3*HBC-41	300	2.0	11.3	14.1	11.6	9.0	6.4
			1.5	6.7	13.7	11.2	8.7	6.2
			1.0	3.2	13.0	10.6	8.2	5.9
	4*HBC-341	400	2.0	14.4	18.2	14.9	11.6	8.3
			1.5	8.9	17.6	14.4	11.2	8.0
			1.0	4.5	16.3	13.36	10.4	7.4
	5*HBC-41	500	2.0	15.0	21.4	17.5	13.6	9.7
			1.5	9.0	20.5	16.8	13.0	9.3
			1.0	4.4	18.8	15.3	11.9	8.5
	6*HBC-41	600	2.0	15.0	23.2	19.0	14.8	10.5
			1.5	9.0	22.1	18.1	14.1	10.0
			1.0	4.4	20.2	16.5	12.8	9.2
	8*HBC-41	800	2.0	18.8	28.4	23.2	18.1	12.9
			1.5	11.3	26.8	21.9	17.1	12.2
			21.0	5.5	24.1	19.7	15.3	10.9
	10*HBC-41	1000	2.0	19.9	33.3	27.2	21.2	15.1
			1.5	12.3	31.1	25.5	19.8	14.1
			1.0	6.2	27.7	22.7	17.6	12.6
	13*HBC-41	1300	2.0	23.4	38.1	31.2	24.2	17.3
			1.5	14.0	35.4	29.0	22.5	16.1
			1.0	6.8	31.6	25.9	20.1	14.4

NOTES:

1. Ratings at 70 degree entering air temp.
2. Contact factory for capacities at other conditions

- * -null - open blower
- P - with insulated return plenum
- R - recessed with telescoping panel
- C - cabinet exposed

CORRECTION FACTORS

COOLING CAPACITY CORRECTION FACTORS														
MODEL	3HBC		4HBC		5HBC		6HBC		8HBC		10HBC		13HBC	
CFM	TH	SH	TH	SH	TH	SH	TH	SH	TH	SH	TH	SH	TH	SH
150	.70	.64												
175	.75	.70												
200	.80	.76												
225	.85	.82												
250	0.9	.88	.70	.64										
300	1.00	1.00	.76	.71	.70	.64								
325	1.04	1.06	.79	.75	.72	.67								
350	1.10	1.12	.82	.78	.75	.70	.69	.63						
400			.88	.86	.80	.76	.73	.68						
450			.94	.93	.85	.82	.77	.73	.71	.66				
500			1.00	1.00	.90	.88	.81	.77	.74	.69				
550			1.06	1.07	.95	.94	.85	.82	.78	.73	.71	.65		
600			1.12	1.14	1.00	1.00	.89	.87	.81	.78	.74	.68		
700					1.10	1.12	.98	.98	.88	.85	.79	.75	.70	.64
800							1.05	1.06	.95	.94	.85	.82	.74	.69
900							1.14	1.16	1.02	1.02	.90	.88	.78	.74
1000									1.09	1.11	.96	.95	.83	.79
1100									1.15	1.18	1.02	1.02	.87	.85
1200											1.07	1.09	.92	.90
1300											1.12	1.14	1.06	1.05
1400													1.00	1.00
1500													1.04	1.05

TH - Total Heat SH - Sensible Heat

PSC MOTOR	ARI APPROVED STANDARD RATINGS						
	MODEL	COIL	CFM	PRESS DROP (FT.WTR.)	COOLING (1000 BTUH)		POWER INPUT (WATTS)
					TH	SH	
	3*HBC-3	3-ROW	310	8.0	9.8	6.7	120
	4*HBC-3		510	12.5	13.4	9.5	120
	5*HBC-3		600	8.0	16.3	11.0	130
	6*HBC-3		730	10.5	20.0	14.0	230
	8*HBC-3		870	8.0	22.5	17.0	340
	10*HBC-3		1070	8.0	27.8	20.8	450
	13*HBC-3		1400	14.0	35.5	26.5	530
	3*HBC-4	4-ROW	310	12.0	10.8	7.0	120
	4*HBC-4		510	23.2	16.0	10.6	120
	5*HBC-4		600	12.0	18.0	11.8	130
	6*HBC-4		730	18.0	23.0	15.6	230
	8*HBC-4		870	14.0	26.9	18.9	340
	10*HBC-4		1070	14.0	32.2	23	450
13*HBC-4	1400		24.0	41.5	29.5	530	

Rated in accordance with ARI Standard 440.



HBC 120 VOLT PSC

BLOWER PERFORMANCE

PSC MOTOR	HBC (120 Volt)														
	CFM vs EXTERNAL STATIC PRESSURE (3 ROW 120 Volt)														
	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)									
						0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	
	3*HBC-3	1/20	1050	.09	HI	335	300	270	235	---	---	---	---	---	
					MED	275	245	220	---	---	---	---	---	---	
					LOW (4)	230	210	---	---	---	---	---	---	---	
	4*HBC-3	1/12	1050	1.1	HI	525	480	425	350	---	---	---	---	---	
					MED	410	375	330	260	---	---	---	---	---	---
					LOW	350	325	280	---	---	---	---	---	---	---
	5*HBC-3	1/12	1050	1.3	HI	610	560	510	450	375	---	---	---	---	
					MED	500	465	425	370	---	---	---	---	---	---
					LOW	355	345	325	290	---	---	---	---	---	---
	6*HBC-3	1/8	1550	1.9	HI	755	730	705	680	650	620	---	---	---	
					MED	675	650	620	595	565	540	---	---	---	---
					LOW	570	550	530	510	485	450	---	---	---	---
	8*HBC-3	1/5	1550	3.0	HI	950	920	895	870	840	810	775	740	635	
					MED	775	755	730	710	690	665	635	605	530	
					LOW	690	605	585	560	540	515	485	460	405	
	10*HBC-3	1/4	1550	3.6	HI	1175	1145	1115	1085	1055	1025	995	960	890	
					MED	950	930	915	900	885	870	850	820	745	
					LOW	805	795	785	775	755	735	710	680	620	
	13*HBC-3	1/5 (two)	1550	2.3 Ea.	HI	1545	1500	1455	1450	1365	1320	1280	1235	1120	
					MED	1355	1320	1280	1230	1205	1165	1125	1085	975	
					LOW	1190	1160	1130	1150	1075	1035	990	940	830	
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 120 Volt)															
3*HBC-4 -31	1/20	1050	0.9	HI	315	280	250	---	---	---	---	---	---		
				MED	260	230	200	---	---	---	---	---	---		
				LOW (4)	220	195	---	---	---	---	---	---	---		
4*HBC-4 -31	1/12	1050	1.1	HI	490	450	395	320	---	---	---	---	---		
				MED	405	370	320	250	---	---	---	---	---		
				LOW	350	320	280	---	---	---	---	---	---		
5*HBC-4 -31	1/12	1050	1.3	HI	605	550	500	445	375	---	---	---	---		
				MED	500	455	415	365	---	---	---	---	---		
				LOW	360	340	315	275	---	---	---	---	---		
6*HBC-4 -31	1/8	1550	1.9	HI	745	710	675	645	610	580	---	---	---		
				MED	745	615	590	560	535	500	---	---	---		
				LOW	650	535	510	485	455	420	---	---	---		
8*HBC-4 -31	1/5	1550	3.0	HI	915	885	855	825	800	765	735	705	625		
				MED	755	730	705	675	650	620	590	555	480		
				LOW	620	595	575	550	530	500	475	440	370		
10*HBC-4 -31	1/4	1550	3.6	HI	1140	1110	1080	1045	1010	975	935	890	825		
				MED	940	915	895	875	850	825	795	765	680		
				LOW	790	775	755	735	715	690	660	630	555		
13*HBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI	1495	1450	1405	1360	1310	1165	1215	1165	1055		
				MED	1310	1270	1235	1200	1160	1115	1070	1020	930		
				LOW	1165	1130	1095	1060	1020	985	940	895	780		
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 120 Volt)															
3*HBC-41 -32	1/20	1050	0.9	HI	305	270	230	---	---	---	---	---	---		
				MED	250	225	200	---	---	---	---	---	---		
				LOW (4)	210	190	---	---	---	---	---	---	---		
4*HBC-41 -32	1/12	1050	1.1	HI	470	420	365	290	---	---	---	---	---		
				MED	395	355	300	235	---	---	---	---	---		
				LOW	345	305	270	---	---	---	---	---	---		
5*HBC-41 -32	1/12	1050	1.3	HI	575	520	470	415	---	---	---	---	---		
				MED	480	440	400	350	---	---	---	---	---		
				LOW	345	325	300	---	---	---	---	---	---		
6*HBC-41 -32	1/8	1550	1.9	HI	660	625	595	565	530	495	---	---	---		
				MED	555	520	485	445	425	395	---	---	---		
				LOW	475	440	410	380	350	320	---	---	---		
8*HBC-41 -32	1/5	1550	3.0	HI	905	875	845	815	785	750	715	680	605		
				MED	755	725	705	680	650	620	590	555	495		
				LOW	635	615	595	570	550	525	495	465	405		
10*HBC-41 -32	1/4	1550	3.6	HI	1115	1075	1040	1005	970	935	900	860	765		
				MED	925	905	880	860	835	805	765	725	630		
				LOW	790	765	745	725	700	675	640	605	530		
13*HBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI	1470	1420	1370	1320	1270	1220	1165	1105	965		
				MED	1355	1315	1265	1220	1170	1115	1060	1005	870		
				LOW	1195	1160	1120	1080	1035	985	935	875	745		

- Notes:**
1. Motors are 120v/60Hz,high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. Coil fins-per-inch varies to allow consistent air flow
 4. The size 3 motor (models 3(P/R/C) (HBC) may not start on low speed due to low starting torque. These units must be wired to start on either Medium or High speed.

PHBC 120 VOLT PSC

BLOWER PERFORMANCE

PSC MOTOR	PHBC (120 Volt)													
	CFM vs EXTERNAL STATIC PRESSURE (3 ROW 120 Volt)													
	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
						0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
	3PHBC-3	1/20	1050	.09	HI	320	285	250	---	---	---	---	---	---
					MED	260	230	205	---	---	---	---	---	---
					LOW (4)	220	200	---	---	---	---	---	---	---
	4PHBC-3	1/12	1050	1.1	HI	405	355	295	---	---	---	---	---	---
					MED	360	315	255	---	---	---	---	---	---
					LOW	340	305	245	---	---	---	---	---	---
	5PHBC-3	1/12	1050	1.3	HI	545	500	445	385	---	---	---	---	---
					MED	475	440	395	335	---	---	---	---	---
					LOW	345	320	290	250	---	---	---	---	---
	6PHBC-3	1/8	1550	1.9	HI	705	675	650	620	590	555	---	---	---
MED					645	620	595	565	535	505	---	---	---	
LOW					560	540	515	490	460	430	---	---	---	
8PHBC-3	1/5	1550	3.0	HI	890	855	820	780	745	710	670	630	540	
				MED	760	725	695	665	630	595	565	530	460	
				LOW	620	595	565	540	515	485	455	420	360	
10PHBC-3	1/4	1550	3.6	HI	1165	1130	1095	1060	1020	975	930	880	785	
				MED	1065	1025	990	955	915	875	835	795	710	
				LOW	890	865	840	815	790	765	735	700	625	
13PHBC-3	1/5 (two)	1550	2.3 Ea.	HI	1345	1295	1250	1205	1155	1100	1045	980	855	
				MED	1255	1210	1170	1120	1075	1025	970	915	795	
				LOW	1165	1125	1080	1035	985	930	875	820	710	
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 120 Volt)														
3PHBC-4 -31	1/20	1050	0.9	HI	290	260	230	---	---	---	---	---	---	
				MED	245	220	---	---	---	---	---	---	---	
				LOW (4)	215	185	---	---	---	---	---	---	---	
4PHBC-4 -31	1/12	1050	1.1	HI	380	335	285	---	---	---	---	---	---	
				MED	345	295	---	---	---	---	---	---	---	
				LOW	315	275	---	---	---	---	---	---	---	
5PHBC-4 -31	1/12	1050	1.3	HI	540	490	435	370	---	---	---	---	---	
				MED	475	435	365	290	---	---	---	---	---	
				LOW	365	340	305	---	---	---	---	---	---	
6PHBC-4 -31	1/8	1550	1.9	HI	695	660	630	595	560	520	---	---	---	
				MED	620	590	560	530	500	465	---	---	---	
				LOW	560	525	490	460	425	390	---	---	---	
8PHBC-4 -31	1/5	1550	3.0	HI	870	830	795	755	720	685	645	605	520	
				MED	745	715	680	645	615	580	545	510	440	
				LOW	605	580	555	535	505	480	445	415	355	
10PHBC-4 -31	1/4	1550	3.6	HI	1120	1075	1030	990	945	905	865	820	725	
				MED	1035	1000	960	920	880	840	795	755	675	
				LOW	905	875	845	815	780	750	715	675	600	
13PHBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI	1300	1255	1210	1165	1115	1060	1005	940	820	
				MED	1225	1180	1130	1080	1035	950	935	880	755	
				LOW	1125	1080	1035	990	945	895	845	795	690	
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 120 Volt)														
3PHBC-41 -32	1/20	1050	0.9	HI	285	250	220	---	---	---	---	---	---	
				MED	235	210	---	---	---	---	---	---	---	
				LOW (4)	205	180	---	---	---	---	---	---	---	
4PHBC-41 -32	1/12	1050	1.1	HI	370	320	265	---	---	---	---	---	---	
				MED	325	280	---	---	---	---	---	---	---	
				LOW	295	250	---	---	---	---	---	---	---	
5PHBC-41 -32	1/12	1050	1.3	HI	505	450	395	335	---	---	---	---	---	
				MED	445	400	350	295	---	---	---	---	---	
				LOW	325	300	270	---	---	---	---	---	---	
6PHBC-41 -32	1/8	1550	1.9	HI	665	625	590	555	515	480	---	---	---	
				MED	605	570	535	505	470	430	---	---	---	
				LOW	535	505	470	440	405	370	---	---	---	
8PHBC-41 -32	1/5	1550	3.0	HI	845	810	780	750	715	680	640	605	530	
				MED	725	700	670	640	610	580	550	520	435	
				LOW	605	580	560	535	505	480	455	425	370	
10PHBC-41 -32	1/4	1550	3.6	HI	1015	975	940	900	865	825	785	750	670	
				MED	890	855	825	795	765	735	700	665	590	
				LOW	770	740	710	685	660	630	600	570	510	
13PHBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI	1295	1245	1195	1145	1090	1035	975	915	795	
				MED	1215	1165	1120	1065	1015	960	905	845	725	
				LOW	1120	1075	1025	975	930	885	835	785	625	

Notes:

1. Motors are 120v/60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow
4. The size 3 motor (models 3(P/R/C) (HBC) may not start on low speed due to low starting torque. These units must be wired to start on either Medium or High speed.

RHBC 120 VOLT PSC

BLOWER PERFORMANCE

PSC MOTOR	RHBC (120 Volt)														
	CFM vs EXTERNAL STATIC PRESSURE (3 ROW 120 Volt)														
	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)									
						0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	
	3RHBC-3	1/20	1050	.09	HI	320	285	250	---	---	---	---	---	---	
					MED	260	230	205	---	---	---	---	---	---	
					LOW (4)	220	200	---	---	---	---	---	---	---	
	4RHBC-3	1/12	1050	1.1	HI	405	355	295	---	---	---	---	---	---	
					MED	360	315	255	---	---	---	---	---	---	---
					LOW	340	305	245	---	---	---	---	---	---	---
5RHBC-3	1/12	1050	1.3	HI	545	500	445	385	---	---	---	---	---		
				MED	475	440	395	335	---	---	---	---	---	---	
				LOW	345	320	290	250	---	---	---	---	---	---	
6RHBC-3	1/8	1550	1.9	HI	705	675	650	620	590	555	---	---	---		
				MED	645	620	595	565	535	505	---	---	---	---	
				LOW	560	540	515	490	460	430	---	---	---	---	
8RHBC-3	1/5	1550	3.0	HI	890	855	820	780	745	710	670	630	540		
				MED	745	725	695	665	630	600	565	530	460		
				LOW	620	595	565	540	515	485	455	420	360		
10RHBC-3	1/4	1550	3.6	HI	1165	1130	1095	1060	1020	975	930	880	785		
				MED	1065	1025	990	955	915	875	835	795	710		
				LOW	890	865	840	815	790	765	735	700	625		
13RHBC-3	1/5 (two)	1550	2.3 Ea.	HI	1345	1295	1250	1200	1155	1100	1045	980	855		
				MED	1255	1210	1170	1120	1075	1025	970	915	795		
				LOW	1165	1125	1080	1035	985	930	875	820	710		
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 120 Volt)															
3RHBC-4 -31	1/20	1050	0.9	HI	290	260	230	---	---	---	---	---	---		
				MED	245	220	---	---	---	---	---	---	---		
				LOW (4)	215	185	---	---	---	---	---	---	---		
4RHBC-4 -31	1/12	1050	1.1	HI	380	335	285	---	---	---	---	---	---		
				MED	345	295	---	---	---	---	---	---	---		
				LOW	315	275	---	---	---	---	---	---	---		
5RHBC-4 -31	1/12	1050	1.3	HI	540	490	435	370	---	---	---	---	---		
				MED	475	435	365	290	---	---	---	---	---		
				LOW	365	340	305	---	---	---	---	---	---		
6RHBC-4 -31	1/8	1550	1.9	HI	695	660	630	595	560	520	---	---	---		
				MED	620	590	560	530	500	465	---	---	---		
				LOW	560	525	490	460	425	390	---	---	---		
8RHBC-4 -31	1/5	1550	3.0	HI	870	830	795	755	720	685	645	605	520		
				MED	745	715	680	645	615	580	545	510	440		
				LOW	605	580	555	535	505	480	445	415	355		
10RHBC-4 -31	1/4	1550	3.6	HI	1120	1075	1030	990	945	905	865	820	725		
				MED	1035	1000	960	920	880	840	795	755	675		
				LOW	905	875	845	815	780	750	715	675	600		
13RHBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI	1300	1255	1210	1165	1115	1060	1005	940	820		
				MED	1225	1180	1130	1080	1035	950	935	880	755		
				LOW	1125	1080	1035	990	945	895	845	795	690		
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 120 Volt)															
3RHBC-41 -32	1/20	1050	0.9	HI	285	250	220	---	---	---	---	---	---		
				MED	235	210	---	---	---	---	---	---	---		
				LOW (4)	205	180	---	---	---	---	---	---	---		
4RHBC-41 -32	1/12	1050	1.1	HI	370	320	265	---	---	---	---	---	---		
				MED	325	280	---	---	---	---	---	---	---		
				LOW	295	250	---	---	---	---	---	---	---		
5PRHBC-41 -32	1/12	1050	1.3	HI	505	450	395	335	---	---	---	---	---		
				MED	445	400	350	295	---	---	---	---	---		
				LOW	325	300	270	---	---	---	---	---	---		
6RHBC-41 -32	1/8	1550	1.9	HI	665	625	590	555	515	480	---	---	---		
				MED	605	570	535	505	470	430	---	---	---		
				LOW	535	505	470	440	405	370	---	---	---		
8RHBC-41 -32	1/5	1550	3.0	HI	845	810	780	750	715	680	640	605	530		
				MED	725	700	670	640	610	580	550	520	455		
				LOW	605	580	560	535	505	480	455	425	370		
10RHBC-41 -32	1/4	1550	3.6	HI	1015	975	940	900	865	825	785	750	670		
				MED	890	855	825	795	765	735	700	665	590		
				LOW	770	740	710	685	660	630	600	570	510		
13RHBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI	1295	1245	1195	1145	1090	1035	975	915	795		
				MED	1215	1165	1120	1065	1015	960	905	845	725		
				LOW	1120	1075	1025	975	930	885	835	785	655		

Notes:

1. Motors are 120v/60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow
4. The size 3 motor (models 3(P/R/C) (HBC) may not start on low speed due to low starting torque. These units must be wired to start on either Medium or High speed.

HBC 277 VOLT PSC

BLOWER PERFORMANCE

PSC MOTOR	HBC (277 Volt)														
	CFM vs EXTERNAL STATIC PRESSURE (3 ROW 277 Volt)														
	MODEL	HP	MAX RPM	AMPS (277V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)									
						0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	
	3*HBC-3	1/20	1100	0.48	HI	315	285	255	---	---	---	---	---	---	
					MED	245	220	195	---	---	---	---	---	---	
					LOW	180	160	---	---	---	---	---	---	---	
	4*HBC-3	1/15	1050	0.52	HI	510	450	390	---	---	---	---	---	---	
					MED	410	365	305	---	---	---	---	---	---	---
					LOW	350	315	265	---	---	---	---	---	---	---
	5*HBC-3	1/15	1050	0.52	HI	575	535	490	---	---	---	---	---	---	
					MED	405	375	340	---	---	---	---	---	---	---
					LOW	335	305	275	---	---	---	---	---	---	---
	6*HBC-3	1/812	1625	0.56	HI	700	670	640	615	590	560	530	495	---	
					MED	570	545	520	490	465	430	400	360	---	---
					LOW	475	455	430	400	370	340	300	255	---	---
	8*HBC-3	1/6	1550	0.80	HI	905	880	855	830	800	765	725	685	---	
					MED	720	700	675	650	625	595	565	535	---	---
					LOW	605	585	560	530	505	475	450	420	---	---
	10*HBC-3	1/4	1625	1.526	HI	1170	1140	1105	1070	1035	995	950	905	---	
					MED	945	920	900	875	850	820	785	740	---	---
					LOW	780	755	730	705	680	655	625	590	---	---
	13*HBC-3	1/6 (two)	1550	0.80 Ea.	HI	1580	1535	1490	1450	1400	1355	1300	1245	1130	
					MED	1380	1340	1300	1260	1215	1170	1125	1075	960	
					LOW	1180	1140	1105	1070	1030	990	945	895	775	
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 277 Volt)															
3*HBC-4 -31	1/20	1100	0.48	HI	300	270	---	---	---	---	---	---	---	---	
				MED	230	215	---	---	---	---	---	---	---	---	
				LOW	195	175	---	---	---	---	---	---	---	---	
4*HBC-4 -31	1/15	1050	0.52	HI	485	435	380	---	---	---	---	---	---	---	
				MED	395	355	300	---	---	---	---	---	---	---	
				LOW	350	315	265	---	---	---	---	---	---	---	
5*HBC-4 -31	1/125	1050	0.52	HI	565	525	480	---	---	---	---	---	---	---	
				MED	390	360	325	---	---	---	---	---	---	---	
				LOW	330	300	270	---	---	---	---	---	---	---	
6*HBC-4 -31	1/12	1625	0.56	HI	700	665	635	600	575	545	510	470	---	---	
				MED	570	540	515	490	465	435	400	355	---	---	
				LOW	470	445	420	390	360	330	290	255	---	---	
8*HBC-4 -31	1/6	1550	0.80	HI	865	835	805	780	745	710	670	625	---	---	
				MED	705	680	660	630	605	570	535	495	---	---	
				LOW	580	555	535	505	475	445	415	395	---	---	
10*HBC-4 -31	1/4	1625	1.526	HI	1140	1100	1065	1025	990	950	915	880	---	---	
				MED	915	890	870	845	820	790	755	715	---	---	
				LOW	770	745	720	695	670	640	615	585	---	---	
13*HBC-4 -31	1/6 (two)	1550	0.80 Ea.	HI	1510	1465	1420	1370	1325	1275	1225	1170	1050		
				MED	1320	1280	1245	1205	1165	1120	1075	1025	905		
				LOW	1140	1110	1075	1040	1005	965	920	865	745		
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 277 Volt)															
3*HBC-41 -32	1/20	1100	0.48	HI	295	265	---	---	---	---	---	---	---	---	
				MED	235	210	---	---	---	---	---	---	---	---	
				LOW	190	160	---	---	---	---	---	---	---	---	
4*HBC-41 -32	1/15	1050	0.52	HI	485	440	390	---	---	---	---	---	---	---	
				MED	400	360	310	---	---	---	---	---	---	---	
				LOW	345	315	270	---	---	---	---	---	---	---	
5*HBC-41 -32	1/15	1050	0.52	HI	525	475	430	---	---	---	---	---	---	---	
				MED	385	350	310	---	---	---	---	---	---	---	
				LOW	320	285	250	---	---	---	---	---	---	---	
6*HBC-41 -32	1/12	1625	0.56	HI	660	630	600	575	545	515	480	---	---	---	
				MED	540	510	485	460	430	395	360	---	---	---	
				LOW	455	430	405	380	350	315	280	---	---	---	
8*HBC-41 -32	1/6	1550	0.80	HI	865	830	800	775	740	705	665	625	---	---	
				MED	690	660	630	605	575	545	515	485	---	---	
				LOW	580	550	525	495	470	440	415	385	---	---	
10*HBC-41 -32	1/4	1625	1.26	HI	1100	1065	1030	995	950	900	850	795	---	---	
				MED	940	905	870	845	820	790	750	705	675	---	---
				LOW	770	750	730	710	685	645	600	454	---	---	
13*HBC-41 -32	1/6 (two)	1550	0.80 Ea.	HI	1460	1415	1365	1320	1270	1225	1175	1120	1005		
				MED	1285	1245	1210	1170	1125	1085	1035	985	855		
				LOW	1130	1090	1050	1005	970	930	885	840	710		

Notes:

1. Motors are 120v/60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow

PHBC 277 VOLT PSC

BLOWER PERFORMANCE

PSC MOTOR	PHBC (277 Volt)														
	CFM vs EXTERNAL STATIC PRESSURE (3 ROW 277 Volt)														
	MODEL	HP	MAX RPM	AMPS (277V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)									
						0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	
	3*PHBC-3	1/20	1100	0.48	HI	290	260	---	---	---	---	---	---	---	
					MED	230	200	---	---	---	---	---	---	---	
					LOW	180	155	---	---	---	---	---	---	---	
	4*PHBC-3	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---	
					MED	345	295	---	---	---	---	---	---	---	---
					LOW	310	265	---	---	---	---	---	---	---	---
	5*PHBC-3	1/15	1050	0.52	HI	500	460	415	---	---	---	---	---	---	
					MED	385	350	310	---	---	---	---	---	---	---
					LOW	330	295	260	---	---	---	---	---	---	---
	6*PHBC-3	1/12	1625	0.56	HI	665	630	595	565	540	510	475	430	---	
					MED	545	515	490	465	440	410	375	335	---	---
					LOW	460	430	400	375	350	320	290	250	---	---
	8*PHBC-3	1/6	1550	0.80	HI	850	820	790	760	725	685	645	605	---	
					MED	695	665	640	610	585	555	525	490	---	---
					LOW	575	550	525	500	470	445	420	395	---	---
	10*PHBC-3	1/4	1625	1.26	HI	1040	1000	960	920	885	850	810	775	---	
					MED	885	850	810	780	745	720	690	665	---	---
					LOW	710	680	655	635	610	590	565	540	---	---
	13*PHBC-3	1/6 (two)	1550	0.80 Ea.	HI	1385	1340	1295	1250	1205	1155	1100	1040	905	
					MED	1250	1210	1170	1130	1085	1040	985	930	795	---
					LOW	1110	1070	1030	990	945	900	850	800	675	---
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 277 Volt)															
3*PHBC-4 -31	1/20	1100	0.48	HI	280	255	---	---	---	---	---	---	---		
				MED	230	200	---	---	---	---	---	---	---	---	
				LOW	185	160	---	---	---	---	---	---	---	---	
4*PHBC-4 -31	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---		
				MED	345	295	---	---	---	---	---	---	---	---	
				LOW	305	255	---	---	---	---	---	---	---	---	
5*PHBC-4 -31	1/15	1050	0.52	HI	500	455	405	---	---	---	---	---	---		
				MED	380	340	305	---	---	---	---	---	---	---	
				LOW	330	295	260	---	---	---	---	---	---	---	
6*PHBC-4 -31	1/12	1625	0.56	HI	650	615	585	555	525	490	450	405	---		
				MED	540	510	480	450	425	390	355	320	---	---	
				LOW	460	430	400	375	345	315	280	230	---	---	
8*PHBC-4 -31	1/6	1550	0.80	HI	825	790	760	725	685	650	610	570	---		
				MED	670	640	615	585	560	530	495	465	---	---	
				LOW	560	530	500	475	445	420	395	365	---	---	
10*PHBC-4 -31	1/4	1625	1.26	HI	1020	980	940	905	865	830	790	750	---		
				MED	890	855	820	790	755	725	695	660	---	---	
				LOW	740	710	685	660	635	610	585	555	---	---	
13*PHBC-4 -31	1/6 (two)	1550	0.80 Ea.	HI	1335	1290	1245	1200	1155	1105	1045	985	835		
				MED	1205	1170	1135	1095	1050	1000	940	875	755	---	
				LOW	1075	1040	1000	960	915	870	820	765	645	---	
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 277 Volt)															
3*PHBC-41 -32	1/20	1100	0.48	HI	275	245	---	---	---	---	---	---	---		
				MED	225	200	---	---	---	---	---	---	---	---	
				LOW	185	155	---	---	---	---	---	---	---	---	
4*PHBC-41 -32	1/15	1050	0.52	HI	395	345	---	---	---	---	---	---	---		
				MED	340	300	---	---	---	---	---	---	---	---	
				LOW	300	260	---	---	---	---	---	---	---	---	
5*PHBC-41 -32	1/15	1050	0.52	HI	465	405	365	---	---	---	---	---	---		
				MED	365	325	280	---	---	---	---	---	---	---	
				LOW	305	270	235	---	---	---	---	---	---	---	
6*PHBC-41 -32	1/12	1625	0.56	HI	610	580	550	520	485	450	415	370	---		
				MED	515	485	455	430	400	370	335	300	---	---	
				LOW	440	410	385	355	325	295	260	215	---	---	
8*PHBC-41 -32	1/6	1550	0.80	HI	805	775	740	710	675	640	605	570	---		
				MED	665	635	605	575	550	520	490	460	---	---	
				LOW	560	530	505	475	450	425	400	370	---	---	
10*PHBC-41 -32	1/4	1625	1.26	HI	990	950	915	885	850	815	760	690	---		
				MED	875	835	805	775	745	715	680	620	---	---	
				LOW	735	700	675	650	625	595	560	510	---	---	
13*PHBC-41 -32	1/6 (two)	1550	0.80 Ea.	HI	1285	1230	1195	1150	1100	1045	990	925	795		
				MED	1170	1130	1090	1050	1005	955	900	840	730	---	
				LOW	1045	1010	975	940	895	845	795	735	625	---	

Notes:

1. Motors are 120v/60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow

RHBC 277 VOLT PSC

BLOWER PERFORMANCE

PSC MOTOR	RHBC (277 Volt)														
	CFM vs EXTERNAL STATIC PRESSURE (3 ROW 277 Volt)														
	MODEL	HP	MAX RPM	AMPS (277V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)									
						0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	
	3*RHBC-3	1/20	1100	0.48	HI	290	260	---	---	---	---	---	---	---	
					MED	230	200	---	---	---	---	---	---	---	
					LOW	180	155	---	---	---	---	---	---	---	
	4*RHBC-3	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---	
					MED	345	295	---	---	---	---	---	---	---	---
					LOW	310	265	---	---	---	---	---	---	---	---
	5*RHBC-3	1/15	1050	0.52	HI	500	460	415	---	---	---	---	---	---	
					MED	385	350	310	---	---	---	---	---	---	---
					LOW	330	295	260	---	---	---	---	---	---	---
	6*RHBC-3	1/12	1625	0.56	HI	665	630	595	565	540	510	475	430	---	
					MED	545	515	490	465	440	410	375	335	---	---
					LOW	460	430	400	375	350	320	290	250	---	---
	8*RHBC-3	1/6	1550	0.80	HI	850	820	790	760	725	685	645	605	---	
					MED	695	665	640	610	585	555	525	490	---	---
					LOW	575	550	525	500	470	445	420	395	---	---
	10*RHBC-3	1/4	1625	1.26	HI	1040	1000	960	920	885	850	810	775	---	
					MED	885	850	810	780	745	720	690	665	---	---
					LOW	710	680	655	635	610	590	565	540	---	---
	13*RHBC-3	1/6 (two)	1550	0.80 Ea.	HI	1385	1340	1295	1250	1205	1155	1100	1040	905	
					MED	1250	1210	1170	1130	1085	1040	985	930	765	
					LOW	1110	1070	1030	990	945	900	850	800	675	
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 277 Volt)															
3*RHBC-4 -31	1/20	1100	0.48	HI	280	255	---	---	---	---	---	---	---		
				MED	230	200	---	---	---	---	---	---	---		
				LOW	185	160	---	---	---	---	---	---	---		
4*RHBC-4 -31	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---		
				MED	345	295	---	---	---	---	---	---	---	---	
				LOW	305	255	---	---	---	---	---	---	---	---	
5*RHBC-4 -31	1/15	1050	0.52	HI	500	455	405	---	---	---	---	---	---		
				MED	380	340	305	---	---	---	---	---	---	---	
				LOW	330	295	260	---	---	---	---	---	---	---	
6*RHBC-4 -31	1/12	1625	0.56	HI	650	615	585	555	525	490	450	405	---		
				MED	540	510	480	450	425	390	355	320	---	---	
				LOW	460	430	400	375	345	315	280	230	---	---	
8*RHBC-4 -31	1/6	1550	0.80	HI	825	790	760	725	685	650	610	570	---		
				MED	670	640	615	585	560	530	495	465	---	---	
				LOW	560	530	500	475	445	420	395	365	---	---	
10*RHBC-4 -31	1/4	1625	1.26	HI	1020	980	940	905	865	830	790	750	---		
				MED	890	855	820	790	755	725	685	660	---	---	
				LOW	740	710	685	660	635	610	585	555	---	---	
13*RHBC-4 -31	1/6 (two)	1550	0.80 Ea.	HI	1335	1290	1245	1200	1155	1105	1045	985	835		
				MED	1205	1170	1135	1095	1050	1000	940	875	755		
				LOW	1075	1040	1000	960	915	870	820	765	645		
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 277 Volt)															
3*RHBC-41 -32	1/20	1100	0.48	HI	275	245	---	---	---	---	---	---	---		
				MED	225	200	---	---	---	---	---	---	---	---	
				LOW	185	155	---	---	---	---	---	---	---	---	
4*RHBC-41 -32	1/15	1050	0.52	HI	395	345	---	---	---	---	---	---	---		
				MED	340	300	---	---	---	---	---	---	---	---	
				LOW	300	260	---	---	---	---	---	---	---	---	
5*RHBC-41 -32	1/15	1050	0.52	HI	465	415	365	---	---	---	---	---	---		
				MED	365	325	280	---	---	---	---	---	---	---	
				LOW	305	270	235	---	---	---	---	---	---	---	
6*RHBC-41 -32	1/12	1625	0.56	HI	610	580	550	520	485	450	415	370	---		
				MED	515	485	455	430	400	370	335	300	---	---	
				LOW	440	410	385	355	325	295	260	215	---	---	
8*RHBC-41 -32	1/6	1550	0.80	HI	805	775	740	710	675	640	605	570	---		
				MED	665	635	605	575	550	520	490	460	---	---	
				LOW	560	530	505	475	450	425	400	370	---	---	
10*RHBC-41 -32	1/4	1625	1.26	HI	990	950	915	885	850	815	760	690	---		
				MED	875	835	805	775	745	715	680	620	---	---	
				LOW	735	700	675	650	625	595	560	510	---	---	
13*RHBC-41 -32	1/6 (two)	1550	0.80 Ea.	HI	1285	1230	1195	1150	1100	1045	990	925	795		
				MED	1170	1130	1090	1050	1005	955	900	840	730		
				LOW	1045	1010	975	940	895	845	795	735	625		

Notes:

1. Motors are 120v/60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow

CHBC (ALL) PSC

BLOWER PERFORMANCE

PSC MOTOR	CHBC (120 Volt)						CHBC (277 Volt)					
	(3 ROW 120 Volt)						(3 ROW 277 Volt)					
	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	CFM	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	CFM
	3*CHBC-3	1/20	1050	.09	HI MED LOW	300 245 210	3*CHBC-3	1/20	1100	0.48	HI MED LOW	285 220 160
	4*CHBC-3	1/12	1050	1.1	HI MED LOW	480 375 325	4*CHBC-3	1/15	105	0.52	HI MED LOW	450 365 315
	5*CHBC-3	1/12	1050	1.3	HI MED LOW	560 465 345	5*CHBC-3	1/15	1050	0.52	HI MED LOW	535 375 305
	6*CHBC-3	1/8	1550	1.9	HI MED LOW	730 650 550	6*CHBC-3	1/12	1625	0.56	HI MED LOW	670 545 455
	8*CHBC-3	1/5	1550	3.0	HI MED LOW	920 750 605	8*CHBC-3	1/6	1550	0.80	HI MED LOW	880 700 585
	10*CHBC-3	1/4	1550	3.6	HI MED LOW	1145 930 795	10*CHBC-3	1/4	1625	1.26	HI MED LOW	1140 920 755
	13*CHBC-3	1/5 (two)	1550	2.3 Ea.	HI MED LOW	1500 1320 1160	13*CHBC-3	1/6 (two)	1550	0.80 Ea.	HI MED LOW	1535 1340 1140
PSC MOTOR	(4 ROW or 3/1 Split 120 Volt)						(4 ROW or 3/1 Split 277 Volt)					
	3*CHBC-4 -31	1/20	1050	0.9	HI MED LOW	280 230 195	3*CHBC-4 -31	1/20	1100	0.48	HI MED LOW	270 215 175
	4*CHBC-4 -31	1/12	1050	1.1	HI MED LOW	450 370 320	4*CHBC-4 -31	1/15	1050	0.52	HI MED LOW	435 355 315
	5*CHBC-4 -31	1/12	1050	1.3	HI MED LOW	550 455 340	5*CHBC-4 -31	1/15	1050	0.52	HI MED LOW	525 360 300
	6*CHBC-4 -31	1/8	1550	1.9	HI MED LOW	710 615 535	6*CHBC-4 -31	1/12	1625	0.56	HI MED LOW	665 540 445
	8*CHBC-4 -31	1/5	1550	3.0	HI MED LOW	885 730 595	8*CHBC-4 -31	1/6	1550	0.80	HI MED LOW	835 680 555
	10*CHBC-4 -31	1/4	1550	3.6	HI MED LOW	1110 915 770	10*CHBC-4 -31	1/4	1625	1.26	HI MED LOW	1100 890 745
	13*CHBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI MED LOW	1450 1270 1130	13*CHBC-4 -31	1/56 (two)	1550	0.80 Ea.	HI MED LOW	1465 1280 1110
	(4/1 or 3/2 Split 120 Volt)						(4/1 or 3/2 Split 277 Volt)					
	3*CHBC-41 -32	1/20	1050	0.9	HI MED LOW	270 225 190	3*CHBC-41 -32	1/20	1100	0.48	HI MED LOW	265 210 160
PSC MOTOR	4*CHBC-41 -32	1/12	1050	1.1	HI MED LOW	420 355 305	4*CHBC-41 -32	1/15	1050	0.52	HI MED LOW	440 355 315
	5*CHBC-41 -32	1/12	1050	1.3	HI MED LOW	520 440 325	5*CHBC-41 -32	1/15	1050	0.52	HI MED LOW	480 350 285
	6*CHBC-41 -32	1/8	1550	1.9	HI MED LOW	625 520 440	6*CHBC-41 -32	1/12	1625	0.56	HI MED LOW	630 510 430
	8*CHBC-41 -32	1/5	1550	3.0	HI MED LOW	875 725 615	8*CHBC-41 -32	1/6	1550	0.80	HI MED LOW	830 660 550
	10*CHBC-41 -32	1/4	1550	3.6	HI MED LOW	1075 900 765	10*CHBC-41 -32	1/4	1625	1.26	HI MED LOW	1065 905 750
	13*CHBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI MED LOW	1420 1315 1160	13*CHBC-41 -32	1/6 (two)	1550	0.80 Ea.	HI MED LOW	1415 1245 1090

HBCX 120V ECM

BLOWER PERFORMANCE

115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (3-ROW)											
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4*HBCX-3	1/7	1.4	White	480	455	430	405	380	355	330	*
			Green	400	365	330	305	280	250	220	*
			Orange	350	315	280	250	220	195	170	*
			Yellow	280	235	190	155	120	*	*	*
6*HBCX-3	1/7	2.5	White	690	670	650	635	620	600	580	*
			Green	660	635	610	580	550	540	530	*
			Orange	570	545	520	500	480	455	430	*
			Yellow	480	455	430	410	390	365	340	*
8*HBCX-3	1/2	4.6	Green	980	945	910	890	870	845	820	720
			Orange	800	780	760	745	730	715	700	660
			Yellow	680	660	640	620	600	580	560	530
			Red	530	510	490	470	450	430	410	360
10*HBCX-3	1/2	4.6	White	1120	1105	1090	1075	1060	1040	1020	960
			Green	1010	995	980	960	940	925	910	880
			Orange	830	810	790	765	740	720	700	660
			Yellow	690	665	640	620	600	575	550	510
12*HBCX-3	1/2	6.2	White	1380	1365	1350	1325	1300	1285	1270	1230
			Orange	1180	1165	1150	1130	1110	1090	1070	1030
			Yellow	1080	1070	1060	1045	1030	1010	990	960
			Red	1020	1000	980	960	940	925	910	880
115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (4-ROW or 3/1 SPLIT)											
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4*HBCX-4 -31	1/7	1.4	White	480	455	430	405	380	355	330	*
			Green	400	365	330	305	280	250	220	*
			Orange	350	315	280	250	220	195	170	*
			Yellow	280	235	190	155	120	*	*	*
6*HBCX-4 -31	1/7	2.5	White	690	670	650	635	620	600	580	*
			Green	660	635	610	580	550	540	530	*
			Orange	570	545	520	500	480	455	430	*
			Yellow	480	455	430	410	390	365	340	*
8*HBCX-4 -31	1/2	4.6	Green	980	945	910	890	870	845	820	720
			Orange	800	780	760	745	730	715	700	660
			Yellow	680	660	640	620	600	580	560	530
			Red	530	510	490	470	450	430	410	360
10*HBCX-4 -31	1/2	4.6	White	1120	1105	1090	1075	1060	1040	1020	960
			Green	1010	995	980	960	940	925	910	880
			Orange	830	810	790	765	740	720	700	660
			Yellow	690	665	640	620	600	575	550	510
12*HBCX-4 -31	1/2	6.2	White	1380	1365	1350	1325	1300	1285	1270	1230
			Orange	1180	1165	1150	1130	1110	1090	1070	1030
			Yellow	1080	1070	1060	1045	1030	1010	990	960
			Red	1020	1000	980	960	940	925	910	880
115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (3/2 or 4/1 SPLIT)											
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4*HBCX-32 -41	1/7	1.4	White	480	455	430	405	380	355	330	*
			Green	400	365	330	305	280	250	220	*
			Orange	350	315	280	250	220	195	170	*
			Yellow	280	235	190	155	120	*	*	*
6*HBCX-32 -41	1/7	2.5	White	690	670	650	635	620	600	580	*
			Green	660	635	610	580	550	540	530	*
			Orange	570	545	520	500	480	455	430	*
			Yellow	480	455	430	410	390	365	340	*
8*HBCX-32 -41	1/2	4.6	Green	980	945	910	890	870	845	820	720
			Orange	800	780	760	745	730	715	700	660
			Yellow	680	660	640	620	600	580	560	530
			Red	530	510	490	470	450	430	410	360
10*HBCX-32 -41	1/2	4.6	White	1120	1105	1090	1075	1060	1040	1020	960
			Green	1010	995	980	960	940	925	910	880
			Orange	830	810	790	765	740	720	700	660
			Yellow	690	665	640	620	600	575	550	510
12*HBCX-32 -41	1/2	6.2	White	1380	1365	1350	1325	1300	1285	1270	1230
			Orange	1180	1165	1150	1130	1110	1090	1070	1030
			Yellow	1080	1070	1060	1045	1030	1010	990	960
			Red	1020	1000	980	960	940	925	910	880

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER, LINE VOLTAGE TERMINAL BLOCK, LOW VOLTAGE TERMINAL STRIP, IN FACTORY MOUNTED CONTROL BOX

PHBCX 120V ECM

BLOWER PERFORMANCE

ECM MOTOR	115V/1/60 ECM MOTOR				PHBCX SERIES (PLENUM)- CFM vs ESP (3-ROW)							
	MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
					0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
	4*PHBCX-3	1/7	1.4	White	455	430	405	380	355	330	*	*
				Green	365	330	305	280	250	220	*	*
				Orange	315	280	250	220	195	170	*	*
				Yellow	235	190	155	120	*	*	*	*
	6*PHBCX-3	1/7	2.5	White	670	650	635	620	600	580	*	*
				Green	635	610	580	550	540	530	*	*
				Orange	545	520	500	480	455	430	*	*
				Yellow	455	430	410	390	365	340	*	*
	8*PHBCX-3	1/2	4.6	Green	945	910	890	870	845	820	720	*
				Orange	780	760	745	730	715	700	660	*
				Yellow	660	640	620	600	580	560	530	*
				Red	510	490	470	450	430	410	360	*
	10*PHBCX-3	1/2	4.6	White	1105	1090	1075	1060	1040	1020	960	*
				Green	995	980	960	940	925	910	880	*
				Orange	810	790	765	740	720	700	660	*
				Yellow	665	640	620	600	575	550	510	*
	12*PHBCX-3	1/2	6.2	White	1365	1350	1325	1300	1285	1270	1230	*
				Orange	1165	1150	1130	1110	1090	1070	1030	*
				Yellow	1070	1060	1045	1030	1010	990	960	*
				Red	1000	980	960	940	925	910	880	*
115V/1/60 ECM MOTOR				PHBCX SERIES (PLENUM)- CFM vs ESP (4-ROW or 3/1 SPLIT)								
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)								
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5	
4*PHBCX-4	1/7	1.4	White	455	430	405	380	355	330	*	*	
			Green	365	330	305	280	250	220	*	*	
			Orange	315	280	250	220	195	170	*	*	
			Yellow	235	190	155	120	*	*	*	*	
6*PHBCX-4	1/7	2.5	White	670	650	635	620	600	580	*	*	
			Green	635	610	580	550	540	530	*	*	
			Orange	545	520	500	480	455	430	*	*	
			Yellow	455	430	410	390	365	340	*	*	
8*PHBCX-4	1/2	4.6	Green	945	910	890	870	845	820	720	*	
			Orange	780	760	745	730	715	700	660	*	
			Yellow	660	640	620	600	580	560	530	*	
			Red	510	490	470	450	430	410	360	*	
10*PHBCX-4	1/2	4.6	White	1105	1090	1075	1060	1040	1020	960	*	
			Green	995	980	960	940	925	910	880	*	
			Orange	810	790	765	740	720	700	660	*	
			Yellow	665	640	620	600	575	550	510	*	
12*PHBCX-4	1/2	6.2	White	1365	1350	1325	1300	1285	1270	1230	*	
			Orange	1165	1150	1130	1110	1090	1070	1030	*	
			Yellow	1070	1060	1045	1030	1010	990	960	*	
			Red	1000	980	960	940	925	910	880	*	
115V/1/60 ECM MOTOR				PHBCX SERIES (PLENUM)- CFM vs ESP (3/2 SPLIT)								
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)								
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5	
4*PHBCX-32	1/7	1.4	White	455	430	405	380	355	330	*	*	
			Green	365	330	305	280	250	220	*	*	
			Orange	315	280	250	220	195	170	*	*	
			Yellow	235	190	155	120	*	*	*	*	
6*PHBCX-32	1/7	2.5	White	670	650	635	620	600	580	*	*	
			Green	635	610	580	550	540	530	*	*	
			Orange	545	520	500	480	455	430	*	*	
			Yellow	455	430	410	390	365	340	*	*	
8*PHBCX-32	1/2	4.6	Green	945	910	890	870	845	820	720	*	
			Orange	780	760	745	730	715	700	660	*	
			Yellow	660	640	620	600	580	560	530	*	
			Red	510	490	470	450	430	410	360	*	
10*PHBCX-32	1/2	4.6	White	1105	1090	1075	1060	1040	1020	960	*	
			Green	995	980	960	940	925	910	880	*	
			Orange	810	790	765	740	720	700	660	*	
			Yellow	665	640	620	600	575	550	510	*	
12*PHBCX-32	1/2	6.2	White	1365	1350	1325	1300	1285	1270	1230	*	
			Orange	1165	1150	1130	1110	1090	1070	1030	*	
			Yellow	1070	1060	1045	1030	1010	990	960	*	
			Red	1000	980	960	940	925	910	880	*	

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER, LINE VOLTAGE TERMINAL BLOCK, LOW VOLTAGE TERMINAL STRIP, IN FACTORY MOUNTED CONTROL BOX

RHBCX 120V ECM

BLOWER PERFORMANCE

115V/1/60 ECM MOTOR RHBCX SERIES (RECESSED) - CFM vs ESP (3-ROW)											
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4RHBCX-3	1/7	1.4	White	430	405	380	355	330	*	*	*
			Green	330	305	280	250	220	*	*	*
			Orange	280	250	220	195	170	*	*	*
			Yellow	190	155	120	*	*	*	*	*
6RHBCX-3	1/7	2.5	White	650	635	620	600	580	*	*	*
			Green	610	580	550	540	530	*	*	*
			Orange	520	500	480	455	430	*	*	*
			Yellow	430	410	390	365	340	*	*	*
8RHBCX-3	1/2	4.6	Green	910	890	870	845	820	720	*	*
			Orange	760	745	730	715	700	660	*	*
			Yellow	640	620	600	580	560	530	*	*
			Red	490	470	450	430	410	360	*	*
10RHBCX-3	1/2	4.6	White	1090	1075	1060	1040	1020	960	*	*
			Green	980	960	940	925	910	880	*	*
			Orange	790	765	740	720	700	660	*	*
			Yellow	640	620	600	575	550	510	*	*
12RHBCX-3	1/2	6.2	White	1350	1325	1300	1285	1270	1230	*	*
			Orange	1150	1130	1110	1090	1070	1030	*	*
			Yellow	1060	1045	1030	1010	990	960	*	*
			Red	980	960	940	925	910	880	*	*
115V/1/60 ECM MOTOR RHBCX SERIES (RECESSED) - CFM vs ESP (4-ROW or 3/1 SPLIT)											
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4*RHBCX-4	1/7	1.4	White	430	405	380	355	330	*	*	*
			Green	330	305	280	250	220	*	*	*
			Orange	280	250	220	195	170	*	*	*
			Yellow	190	155	120	*	*	*	*	*
6*RHBCX-4	1/7	2.5	White	650	635	620	600	580	*	*	*
			Green	610	580	550	540	530	*	*	*
			Orange	520	500	480	455	430	*	*	*
			Yellow	430	410	390	365	340	*	*	*
8*RHBCX-4	1/2	4.6	Green	910	890	870	845	820	720	*	*
			Orange	760	745	730	715	700	660	*	*
			Yellow	640	620	600	580	560	530	*	*
			Red	490	470	450	430	410	360	*	*
10*RHBCX-4	1/2	4.6	White	1090	1075	1060	1040	1020	960	*	*
			Green	980	960	940	925	910	880	*	*
			Orange	790	765	740	720	700	660	*	*
			Yellow	640	620	600	575	550	510	*	*
12*RHBCX-4	1/2	6.2	White	1350	1325	1300	1285	1270	1230	*	*
			Orange	1150	1130	1110	1090	1070	1030	*	*
			Yellow	1060	1045	1030	1010	990	960	*	*
			Red	980	960	940	925	910	880	*	*
115V/1/60 ECM MOTOR RHBCX SERIES (RECESSED) - CFM vs ESP (3/2 SPLIT)											
MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4*RHBCX-32	1/7	1.4	White	430	405	380	355	330	*	*	*
			Green	330	305	280	250	220	*	*	*
			Orange	280	250	220	195	170	*	*	*
			Yellow	190	155	120	*	*	*	*	*
6*RHBCX-32	1/7	2.5	White	650	635	620	600	580	*	*	*
			Green	610	580	550	540	530	*	*	*
			Orange	520	500	480	455	430	*	*	*
			Yellow	430	410	390	365	340	*	*	*
8*RHBCX-32	1/2	4.6	Green	910	890	870	845	820	720	*	*
			Orange	760	745	730	715	700	660	*	*
			Yellow	640	620	600	580	560	530	*	*
			Red	490	470	450	430	410	360	*	*
10*RHBCX-32	1/2	4.6	White	1090	1075	1060	1040	1020	960	*	*
			Green	980	960	940	925	910	880	*	*
			Orange	790	765	740	720	700	660	*	*
			Yellow	640	620	600	575	550	510	*	*
12*RHBCX-32	1/2	6.2	White	1350	1325	1300	1285	1270	1230	*	*
			Orange	1150	1130	1110	1090	1070	1030	*	*
			Yellow	1060	1045	1030	1010	990	960	*	*
			Red	980	960	940	925	910	880	*	*

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER, LINE VOLTAGE TERMINAL BLOCK, LOW VOLTAGE TERMINAL STRIP, IN FACTORY MOUNTED CONTROL BOX

CHBCX 120V ECM

BLOWER PERFORMANCE

ECM MOTOR	115V/1/60 ECM MOTOR CHBCX SERIES (EXPOSED) - CFM (3-ROW)				
	MODEL	HP	AMPS/120V	SPEED TAP	CFM
	4*CHBCX-3	1/7	1.4	White	480
				Green	400
				Orange	350
				Yellow	280
	6*CHBCX-3	1/7	2.5	White	690
				Green	660
				Orange	570
				Yellow	480
	8*CHBCX-3	1/2	4.6	Green	980
				Orange	800
				Yellow	680
				Red	530
	10*CHBCX-3	1/2	4.6	White	1120
				Green	1010
				Orange	830
				Yellow	690
	12*CHBCX-3	1/2	6.2	White	1380
				Orange	1180
				Yellow	1080
				Red	1020
115V/1/60 ECM MOTOR CHBCX SERIES (EXPOSED) - CFM (4-ROW or 3/1 SPLIT)					
MODEL	HP	AMPS/120V	SPEED TAP	CFM	
4*CHBCX-4	1/7	1.4	White	480	
			Green	400	
			Orange	350	
			Yellow	280	
6*CHBCX-4	1/7	2.5	White	690	
			Green	660	
			Orange	570	
			Yellow	480	
8*CHBCX-4	1/2	4.6	Green	980	
			Orange	800	
			Yellow	680	
			Red	530	
10*CHBCX-4	1/2	4.6	White	1120	
			Green	1010	
			Orange	830	
			Yellow	690	
12*CHBCX-4	1/2	6.2	White	1380	
			Orange	1180	
			Yellow	1080	
			Red	1020	
115V/1/60 ECM MOTOR CHBCX SERIES (EXPOSED) - CFM (3/2 SPLIT)					
MODEL	HP	AMPS/120V	SPEED TAP	CFM	
4*CHBCX-32	1/7	1.4	White	480	
			Green	400	
			Orange	350	
			Yellow	280	
6*CHBCX-32	1/7	2.5	White	690	
			Green	660	
			Orange	570	
			Yellow	480	
8*CHBCX-32	1/2	4.6	Green	980	
			Orange	800	
			Yellow	680	
			Red	530	
10*CHBCX-32	1/2	4.6	White	1120	
			Green	1010	
			Orange	830	
			Yellow	690	
12*CHBCX-32	1/2	6.2	White	1380	
			Orange	1180	
			Yellow	1080	
			Red	1020	

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER, LINE VOLTAGE TERMINAL BLOCK, LOW VOLTAGE TERMINAL STRIP, IN FACTORY MOUNTED CONTROL BOX

HBCX 277V ECM

BLOWER PERFORMANCE

ECM MOTOR	115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (4-ROW or 3/1 SPLIT)											
	MODEL	HP	AMPS/120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
					0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
	4*HBCX-4 -31	1/6	1.4	White	500	480	460	405	410	390	370	*
				Green	420	390	360	305	320	290	260	*
				Orange	370	340	310	250	250	220	190	*
				Yellow	290	260	230	155	140	*	*	*
	6*HBCX-4 -31	1/6	2.5	White	690	670	650	635	610	585	560	*
				Green	640	620	600	580	560	540	520	*
				Orange	540	520	500	500	460	440	420	*
Yellow				440	420	400	410	360	335	310	*	
8*HBCX-4 -31	1/2	4.6	Green	990	960	930	890	860	825	790	720	
			Orange	840	825	810	745	780	760	740	700	
			Yellow	680	660	640	620	600	585	570	540	
			Red	500	480	460	470	420	400	380	*	
10*HBCX-4 -31	1/2	4.6	White	1140	1120	1100	1080	1060	1040	1020	980	
			Green	1040	1020	1000	980	960	940	920	880	
			Orange	860	840	820	800	780	760	740	700	
			Yellow	710	690	670	650	630	610	590	*	
12*HBCX-4 -31	1/2	6.2	White	1340	1320	1300	1275	1250	1225	1200	1150	
			Orange	1230	1220	1200	1175	1150	1125	1100	1050	
			Yellow	1130	1110	1090	1070	1050	1020	1000	950	
			Red	1040	1020	1000	970	940	920	900	*	

GUIDE SPECIFICATIONS

Part 1 — General

1.01 SECTION INCLUDES

- A. Fan Coil Units

1.02 REFERENCES

- AMCA 99 – Standards Handbook
- AMCA 210 -- Laboratory Methods for Testing Fans for Rating Purposes
- AMCA 300 – Test Code for Sound Rating Air Moving Devices
- ARI 440 – Room Fan-Coil Unit
- ASTMB117 – Standard Practice for Operating Salt Spray Apparatus
- NEMA MGI – Motors and Generators
- NFPA 70 – National Electric Code
- SMACNA – HVAC Duct Construction Standards – Metal and Flexible
- UL 723 – Test for Surface Burning Characteristics of Building Materials
- UL 900 – Test Performance of Air Filter Units
- UL 1995 – Standard for Heating and Cooling Equipment
- UL 94 – Test for Flammability of Plastic Materials for Parts in Devices and Appliances

1.03 SUBMITTALS

- A. Shop drawings: Indicate assembly, unit dimensions, weight loading, required clearances, construction details, field connection details, and electrical characteristics and connection requirements. A computer generated capacity selection shall be submitted for each cooling coil with design points and final operating point clearly noted.
- B. Product Data:
 - 1. Provide literature that indicates dimensions, weights, capacities, ratings, fan performance, finishes of materials, and electrical characteristics and connection requirements.
 - 2. Provide data of filter media, filter performance data.
 - 3. Manufacturer's installation instructions.

1.04 OPERATION AND MAINTENANCE DATA

- A. Maintenance Data: Include instructions for lubrication, filter replacement and motor and drive replacement.

1.05 QUALIFICATIONS

- A. Maintenance Data: Include instructions for lubrication, filter replacement and motor and drive replacement.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Accept products on site on factory-installed shipping skids. Inspect for damage.
- B. Store in clean dry place and protect from weather and construction traffic. Handle carefully to avoid damage to components, enclosures, and finish.

1.07 ENVIRONMENTAL REQUIREMENTS

- A. Do not operate units for any purpose, temporary or permanent, until ductwork is clean, filters are in place, and fan has been test run under observation.

GUIDE SPECIFICATIONS (CONT.)

Part 2 — Products

2.01 MANUFACTURERS

A. The following manufacturers are approved for use. No substitutions will be permitted.

1. First Company, Dallas TX

2.02 CASING

A. Unit shall have corrosion resistant casing consisting of galvanized steel panels. Unit panels shall be fully insulated with 1.5lb fiberglass insulation with anti-microbial agent. Removable panels shall provide full access to unit components..

B. Drain pans shall be heavy gauge galvanized steel with an insulating coating. Optional stainless steel drain pan shall include an insulating coating. Drain pans shall be removable for cleaning or replacement without removing coils or disturbing coil connections.

2.03 SUPPLY FAN

A. Provide DWDI forward-curved supply fans. Fan assemblies shall be statically and dynamically balanced by manufacturer. The housings are constructed from heavy gauge galvanized steel with die-formed inlet cones.

B. Fan and motor mounting platform shall be a minimum of 12 gauge LFQ galvanized steel.

2.04 MOTORS

A. Direct drive motors to be PSC or ECM type, permanently lubricated type with internal thermal overload protection and mounted with rubber isolation bushings.

2.05 ELECTRICAL

A. Provide units with 115, 208-230, or 277V, 3-speed with 24v control transformer, and 15 amp service switch or optional ECM motor with 120/24V control transformer, 15 amp service switch, 4 speed taps. Controls to be factory mounted and tested.

2.07 COOLING AND HEATING COIL SECTIONS

A. Provide access to coils for service and cleaning..

B. Water Coils: fins shall have full drawn collars to provide a continuous surface cover over the entire tube for maximum heat transfer. Tubes shall be mechanically expanded into the fins to provide a continuous primary-to-secondary compression bond over the entire finned length for maximum heat transfer rates. Bare copper tube shall not be visible between fins. Coil tubes shall be seamless copper, expanded into fins, and brazed at joints. Coil connections shall be copper with sweat connection size to be determined by manufacturer based upon the most efficient coil circuiting. Manual air vent connections shall be provided at the highest point to assure proper venting. Coils shall be tested with 350 pounds air pressure and suitable for 300 psig working pressure. Coil casings shall be a formed channel frame of galvanized steel.

2.08 FILTERS

A. Filter to be disposable type and media shall be UL 900 listed, Class I or Class II.

Part 3 — Execution

3.01 INSTALLATION

A. Install in accordance with manufacturer's instructions.



ACCESS PANELS /FILTER



*STANDARD PANEL OPTIONS FOR HBC SERIES					*IAQ MERV 8 PANEL OPTIONS FOR HBC SERIES				
PART #	UNIT SIZE	PANEL TYPE	FRAME DIMENSIONS	*FILTER SIZE	PART #	UNIT SIZE	PANEL TYPE	FRAME DIMENSIONS	*FILTER SIZE
965	3,4,5,6	LOUVERED	27-1/2 X 43	20X20X1 (1)	965-M8	3,4,5,6	LOUVERED	27-1/2 X 43	20X30X1 (1)
965-1		SOLID							
966	8	LOUVERED	27-1/2 X 49	20X20X1 (1)	966-M8	8	LOUVERED	27-1/2 X 49	20X20X1 (2)
966-1		SOLID							
967	10	LOUVERED	27-1/2 X 55-1/2	20X20X1 (1)	967-M8	10	LOUVERED	27-1/2 X 55-1/2	20X20X1 (2)
967-1		SOLID							
967-4	12/13	LOUVERED	27-5/8 X 70-1/8	10X65X1 (1)	967-8M8	12/13	LOUVERED	27-5/8 X 70-1/8	20X30X1 (2)
967-5		SOLID							

NOTE: * Filters not included

IAQ PANEL PERFORMANCE DATA (4) (Clean Filter)										
	CFM									
	500	600	700	800	900	1000	1100	1200	1300	1500
965-M8 with AF20301HV (20x030, Merv 8) Filters (2)	0.04	0.06	0.06	0.08	0.09	0.10	---	---	---	---
966-M8 with AF20201HV (20x020, Merv 8) Filters (2)	0.04	0.06	0.06	0.08	0.09	0.10	---	---	---	---
967-M8 with AF20201HV (20x020, Merv 8) Filters (2)	---	0.05	0.05	0.07	0.08	0.10	---	---	---	---
967-6-M8 with AF20251HV (20x025, Merv 8) Filters (2)	---	---	---	0.05	0.06	0.07	0.08	0.09	---	---
967-8-M8 with AF20301HV (20x30, Merv 8) Filters (2)	---	---	---	---	---	0.06	0.06	0.08	0.08	0.10

NOTES:

- (1) The above is the actual laboratory test data on these panels.
- (2) Glassfloss® Industries HV series Merv 8 filters were used to generate above data (**filters must be field supplied**)
- (3) Alternate Merv 8 filters would be acceptable provided they have equal or less resistance.
- (4) Refer to fan coil specification sheets for fan coil blower data.

ACCESSORIES

THERMOSTATS

T420 - Manual Changeover with 3 speed fan switch T421 - Auto Changeover with 3 speed fan switch		HEAT-OFF-COOL System Switch Accepts 24 to 277 VAC., 50 or 60 Hz Maximum Ambient: 130°F Optional Remote Thermistor Probe Set Point Range: 50-90°F Agency Approvals: ETL, UL Canada CE Mounting: Installs to a standard 2" x 4" device box
T200 - Manual Changeover with Digital Display with Auto Speed Fan Switch T201 - **Auto Changeover with Digital Display with Auto Speed Fan Switch		HEAT/COOL System Switch, Manual or Auto 3-Speed Fan switch with Auto Speed Feature Separate On-Off Switch 18-30 VAC, 50/60 Hz Temperature Accuracy: $\pm 1.8^{\circ}\text{F}$ Ambient Temperature: 50-122°F Set Point Range: 64-88°F

SINGLE SPEED THERMOSTATS

T630 - Manual Changeover Digital Display, Single Speed Fan	1-Speed Fan (on-Auto) 	HEAT-OFF-COOL System Switch Manual Changeover 18-30 VAC, 50/60 Hz Temperature Accuracy: $\pm 1.0^{\circ}\text{F}$ Ambient Temperature: 14-140°F Set Point Range: 45-90°F DC Power: 3.0 Volt DC (2 AA Alkaline batteries included)
T832 7-Day Programmable 1 heat, 1 cool, Single Speed, Touch Screen display, C7189 Remote sensor available	1-Speed Fan (On-Auto) 	HEAT-OFF-COOL-AUTO Fan Options: Auto-on Circ 20 - 30 Vac, 50/60 Hz Ambient Temperature: 0-120o F Set Point Range: Clg. 50-99°F Htg. 40-90°F Powering methods: Battery only Common wire only Common wire with battery backup
T4071 5/8 T4072 7/8 Auto Changeover Requires Aquastat (2-pipe applications)		Strap-on Aquastat 5/8" O.D. Tubing 10 amps induction 60 amps locked rotor 25 amps resistive Temperature Changes at 95°F + 10°F Resets at 65°F + 5°F

ACCESSORIES

3-SPEED ROTARY SWITCH

W/OFF POSITION	E332		Resistive Load (Switching Capacity) Rating 10 Amps at 125 VAC 5 Amps at 250/277 VAC Inductive (Motorload) Ratings 1/4 HP at 125/277 VAC 1/2 HP at 250 VAC Standard Switch and Shaft Dimensions 2" x 1-1/2" x 11/16" 3/16" Square Shaft with 13/32" Extension 15/32" Double D 32 Threaded Bushing with 1/4" Extension 6-1/2" Long Leads
NO OFF POSITION	E332-1		

WALL MOUNT 3-SPEED SWITCH

3-SPEED SWITCH ON/OFF WALL MOUNT	T422		Resistive Load (Switching Capacity) Rating 6 Amps at 125 VAC 5 Amps at 230 VAC 4.2 Amps at 277 VAC Inductive (Motorload) Ratings 1/4 HP at 125/277 VAC 1/2 HP at 250 VAC Horizontal mount with manual on/off switch and manual three speed fan switch. Operation with system switch in on position, fan operation is continuous, can be set at one of three speeds. With system switch in off position, all outputs are off.
----------------------------------	------	---	---

OPTIONAL SERVICE SWITCH (15 AMP)

Voltage	Part #		2 x 4 Service Switch Toggle Switch 15 Amp Single Pole 2 X 4 J-Box 2 X 4 Switch Cover - Galvanized Steel
120/1/60	945-6		
230/1/60	945-7		
277/1/60	945-7		
220/1/50	945-7		

SINGLE SPEED FAN (24V Control Circuit)

Voltage	Part #		Relay Transformer Assembly 30 Amp, single pole, normally open, 24v coil 18 GA. 4.25 X 4.25 mounting plate Factory assembled and wired
120/1/60	310-E301		
230/1/60	310-E302		
277/1/60	310-E303		


THREE SPEED FAN (24V Control Circuit)

Multi-24			
FACTORY MOUNTED OPTION ONLY			

3-SPEED CONTROL OPTION FOR HBC SERIES FAN COILS
FACTORY MOUNTED CONTROLS INCLUDE CB500 RELAY BOARD, 24V TRANSFORMER, (15 AMP) SERVICE SWITCH

ACCESSORIES

VALVE PACKAGES AND ACCESSORIES


ACTUATOR		 2-Way Valve and Actuator	ACTUATOR MATERIALS				
2-POSITION (ON-OFF) 50/60HZ			BASE		POLYCARBONATE	APPROVALS	
VOLTAGE	PART #		COVER		POLYCARBONATE	ETL Cul CE	
24V	E50131180		BASE PLATE		ALUMINUM		
120/1/60	E50132180		LEAD LENGTH		6" - (24V 18")		
230/1/60	E50138180		POWER REQUIREMENTS		6.5W, 7 VA		
277/1/60	E50137180		AMBIENT TEMPERATURE RANGE		32 TO 170 F		
			MICRO SWITCH		5 A, 250 V		
		HUMIDITY		95% NON-CONDENSING			
VALVE BODY MATERIALS			VALVE BODIES (2-POSITION)				
BODY		BRASS	E43XXXX 3-WAY		E42XXXX 2-WAY		
STEM		STAINLESS STEEL					
TWO O-RINGS SEALS		EPDM					
PADDLE		EPDM					
FLUID		WATER/GLYCOL					
MAXIMUM % OF GLYCOL		50%	VALVE PACKAGE ACCESSORIES				
TEMPERATURE RANGE		32 TO 230	Automatic Fixed Flow Control			Manual Adj. Flow Setter	
MAXIMUM STATIC PRESSURE		300 PSI	1/2"	3/4"		1/2"	3/4"
SWEAT CONNECTION		1/2", 3/4", 1"	CP654XXXXX	CP655XXXXX		CP601	CP6011
FLOW CHARACTERISTICS			PETE'S PLUG	Requires CP6025 CP61712			
Conne- ction Size	Flow Coefficient	Maximum Close-Off Pressure AP	Ball Valves (Sweat)				
1/2"	1.0 Cv	75	Full Port (T-Handle)			Y-Strainer (Sweat)	
1/2"	2.5 Cv	50	1/2"	3/4"	1"	1/2"	3/4"
3/4"			CP-9	CP-90	CP-905	CP603	CP6031
1/2"	3.5 Cv	30					
3/4"							
3/4"	5 Cv	25	EXTENDED DRIP LIPS	919-1 15"			
1"				919-1X1ss 15"			
3/4"	7.5 Cv	20		919-1EXT 19"			
1"							
1"	8 Cv	20	STANDARD VALVE PACKAGE FACTORY MOUNTED 2-POSITION (ON-OFF)				
			2-WAY 9VH*22BM WITH 2-BV'S				
			3-WAY 9VH*23BM WITH 2-BV'S				

PIPING PACKAGE OPTIONS


TWO POSITION OR MODULATING

Manual air vents are standard and are factory mounted on all chilled water and hot water coils.
All pre-piped on/off or modulating valve packages are factory assembled with sweat connections.


Ball Valves only, No Control Valve

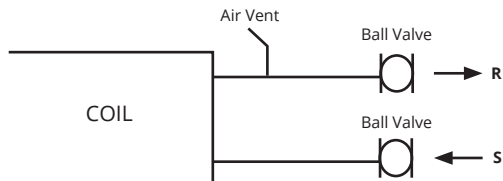


3-Way Valve, No Ball Valves

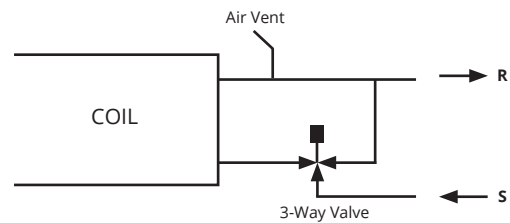


2-Way Valve, No Ball Valves

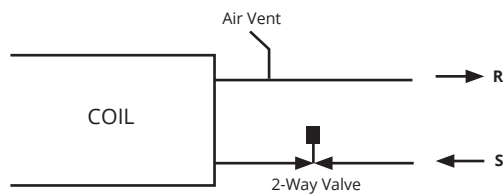


3-Way Valve, with 2-Ball Valves

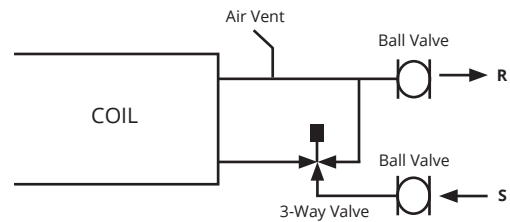


2-Way Valve with 2-Ball Valves

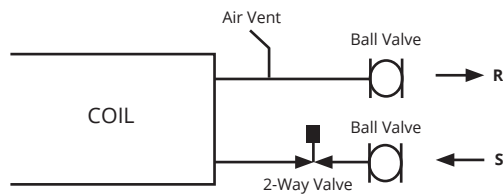

3-Way Valve, with 2-Ball valve and Manual Circuit Setter or Automatic Flow Control, Y-Strainer, PT's

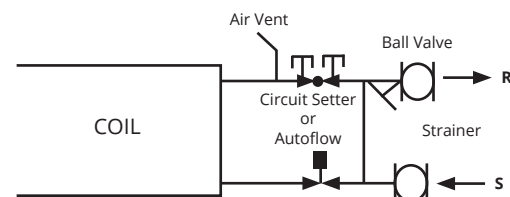

3-Way Valve with 2-Ball Valves and Aquastat

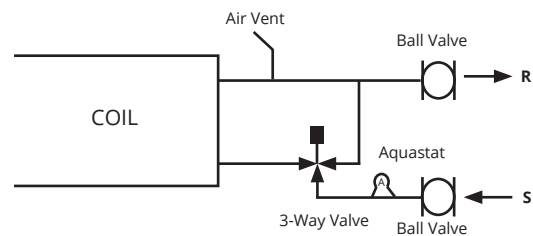


Add Options:

Y-Strainers, Pete's Plugs, Cleanout Blow-down, SS hose kits, Aquastats


**Additional options and configurations may be available.
 Contact factory for availability.**

**Valve packages are available as kits or factory mounted
 on certain products. Contact factory for availability.**


LOW VOLTAGE 24V CONTROLS

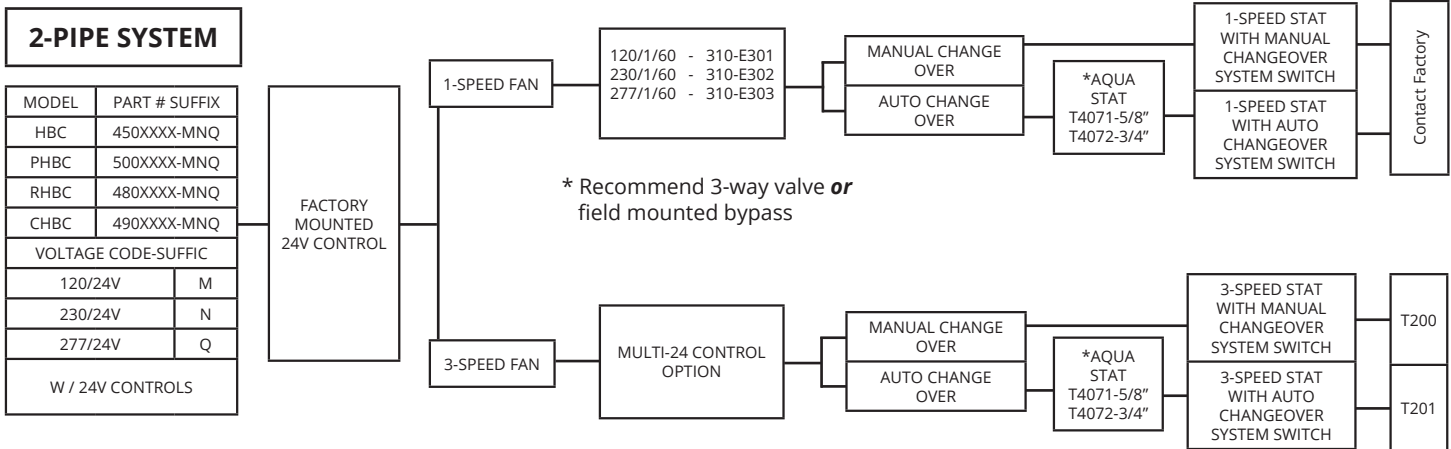

LINE VOLTAGE 120/230/277V CONTROLS

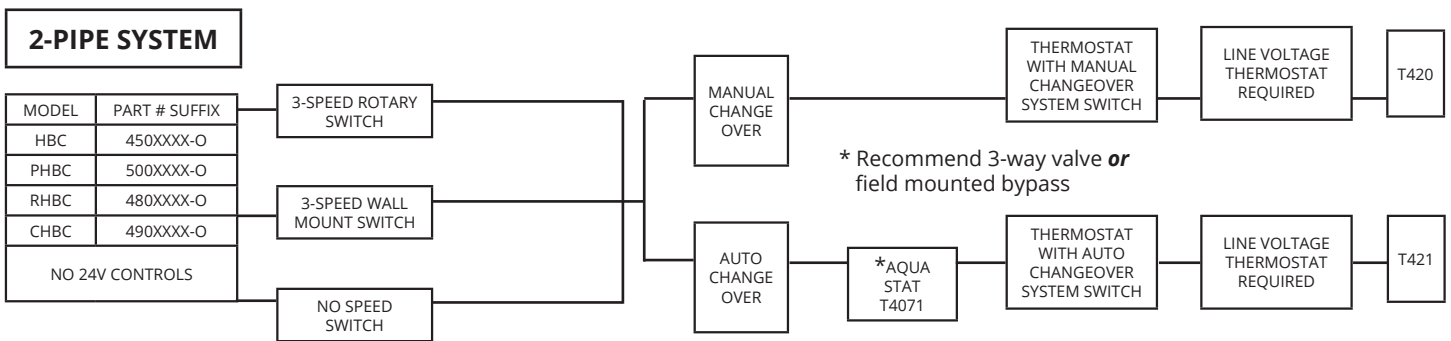

LOW VOLTAGE 24V CONTROLS

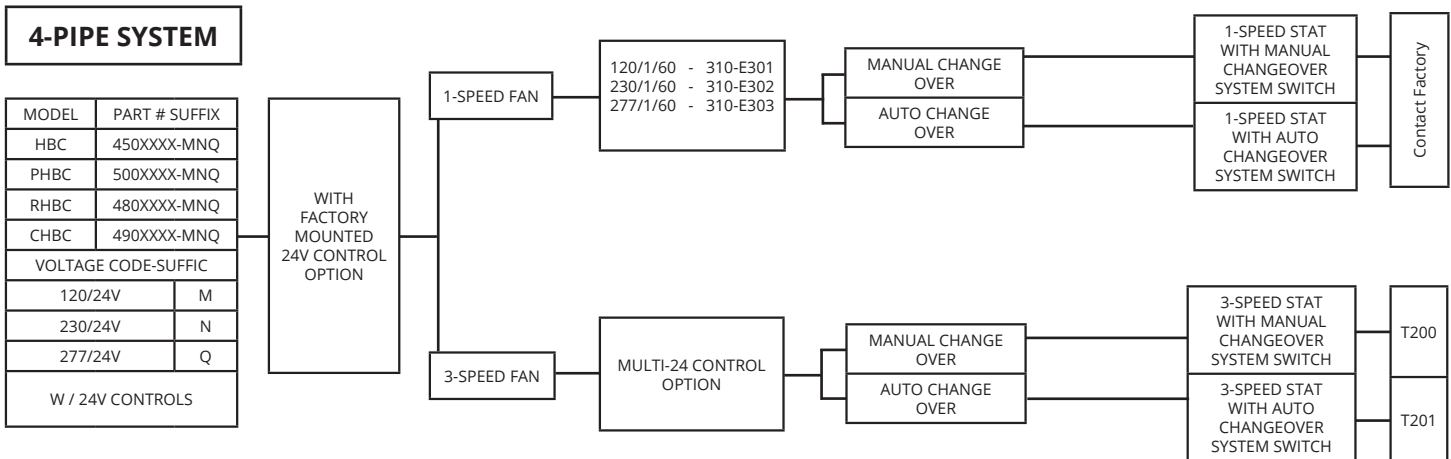

LINE VOLTAGE 120/230/277V CONTROLS

