





# SINGLE PACKAGE VERTICAL GAS UNIT

80% AFUE

12,000 through 30,000 BTUH Cooling Capacity

Up to 60,000 BTUH Heating Capacity

Up to 13.0 SEER

SEER2 Certified\*






### **Features and Benefits**

|  | FIRST-PAK GAS   | Magic pak      | Comfort Pack   |
|--|-----------------|----------------|----------------|
| Average Efficiency SEER  | 13              | 12             | 12             |
| Cooling Capacity   | 0.75 to 2.5 Ton | 1 to 2.5 Ton   | 1 to 2.0 Ton   |
| Heating Capacity 80% AFUE  | 20000 to 60000  | 24000 to 60000 | 28000 to 64000 |
| Refrigerant  | R-410A          | R-410A         | R-410A         |
| Dual Inlet Blower for<br>High Efficiency and Noise reduction                           | <b>✓</b>        | ×              | ×              |
| Front Access Refrigeration Ports   | <b>✓</b>        | ×              | ×              |
| Slide Out Cooling Chassis  | <b>✓</b>        | ✓              | <b>✓</b>       |
| Slide Out Combustion Assembly  | <b>✓</b>        | ×              | <b>✓</b>       |
| Double Isolated Compressor Plate   | <b>✓</b>        | ×              | ×              |
| Blower collar locking mechanism  | <b>✓</b>        | ×              | ×              |
| Full Stainless Combustion Assembly   | <b>✓</b>        | <b>✓</b>       | ×              |
| 20 Year Heat Exchanger Warranty  | <b>✓</b>        | <b>✓</b>       | ×              |
| 409 Stainless Tubular Heat Exchanger   | <b>✓</b>        | <b>✓</b>       | ×              |
| Architectural Louvered Grill Option  | <b>✓</b>        | <b>✓</b>       | <b>✓</b>       |
| Front Accessible Refrigeration Service<br>Ports with an area for temperature<br>probes | <b>✓</b>        | ×              | ×              |
| Factory Installed Condensation<br>Float Switch   | <b>✓</b>        | ×              | ×              |

### **Features and Benefits**

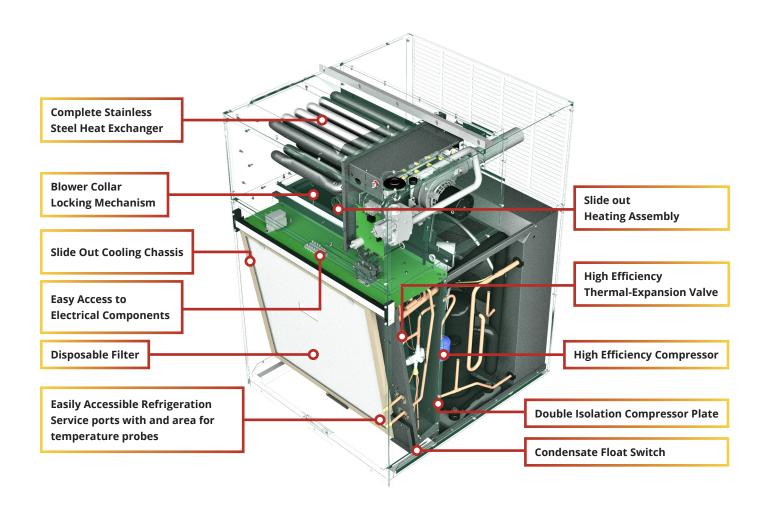


#### SERVICEABILITY FEATURES

- Slide out cooling chassis for ease of service
- Slide out heating assembly that allows for easy access to all gas heat components
- Refrigerant service ports are located on the outside of the cooling chassis
- Factory installed condensate float switch
- · High Efficiency TXV on all models to allow for field adjustments, if required
- See through sight glass that allows for viewing the control board status codes and main burner function
- All electrical components are serviceable from front of the unit
- Compressor capacitor, compressor contactor, and indoor fan control located on panel at the front of the unit
- Additional cooling chassis can be stocked and switched out to limit down time of the occupant


### **Dimensional Comparison**

with Competitors






Magic Pak




**Comfort Pack** 


VS



Condo Pack



## **Physical Data**

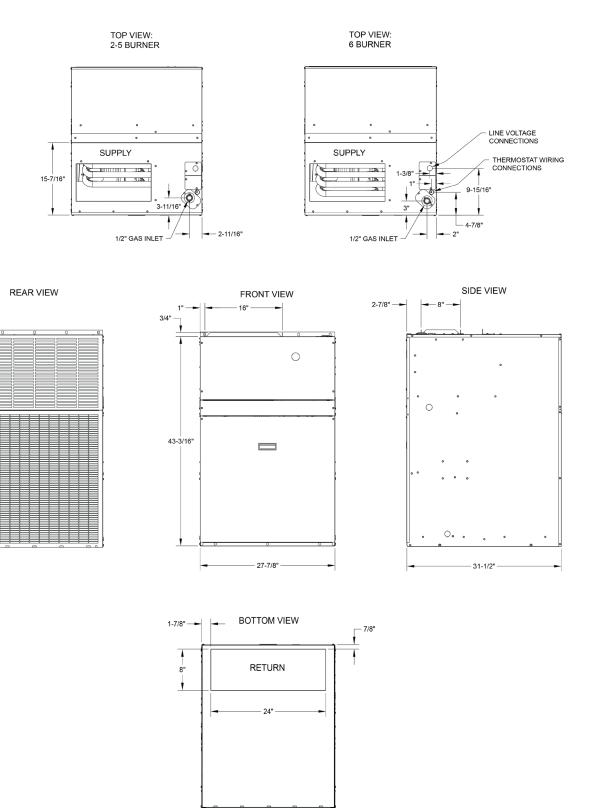



FIRST CO.
P.O. BOX 270969 - DALLAS, TEXAS 75227
PH. (214) 388-5751 | SALES@FIRSTCO.COM
WWW.FIRSTCO.COM