



First Co. . . . Dallas, Texas

- New Features**
- ALL SILENT CONTROLS
 - SEQUENCED HEATERS
 - REDUCED SERVICE WIRING

*Horizontal Hideaway
Direct Expansion
Fan Coil Unit*

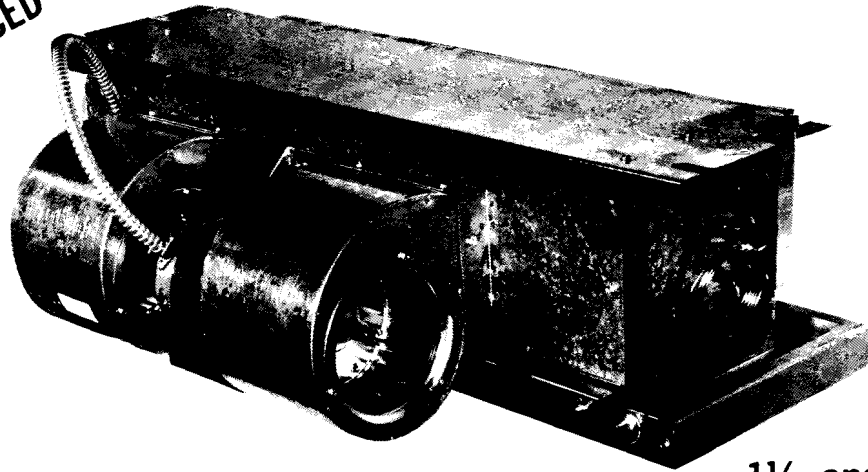


1½ and 2 ton

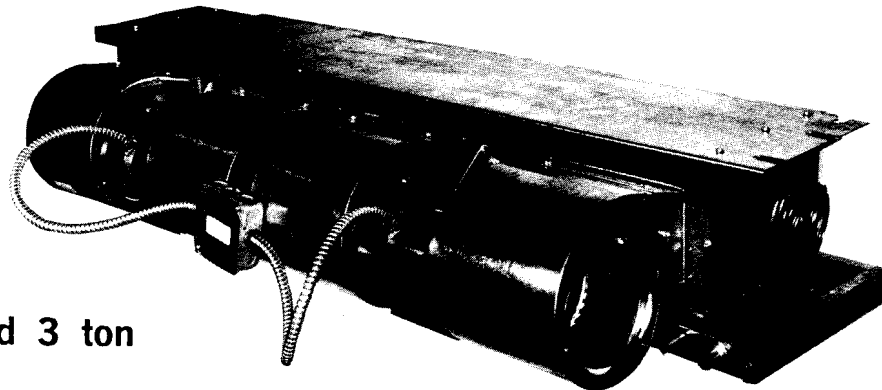

2½ and 3 ton

FEATURING

- All Silent Controls
 - 120V or 240V Motors For Reduced Wiring Cost
 - Integral Electric Heaters Factory Installed
- All Models  Approved

NOMINAL CAPACITIES

Model	Nominal CFM	Nominal Cooling (1)	BTU Heating	DX-A SERIES (2)			DX SERIES			120V Motor Amps
				HEATER		240V Motor Amps	HEATER (3)			
				KW	Amps 240V/1 ϕ		KW	Amps 240V/1 ϕ	Amps 208V/1 ϕ	
DX618-3(A)	600	18,000	10,200	3	12.5	2.1	3	12.5	14.4	4.1
DX618-5(A)			17,050	5	20.8		5	20.8	24.0	
DX618-6(A)			20,450	6	25.0		6	25.0	N.A.	
DX618-8(A)			27,300	8	33.3		8	33.3	38.4	
DX824-3(A)	800	24,000	10,200	3	12.5	2.85	3	12.5	14.4	5.0
DX824-5(A)			17,050	5	20.8		5	20.8	24.0	
DX824-6(A)			20,450	6	25.0		6	25.0	N.A.	
DX824-8(A)			27,300	8	33.3		8	33.3	38.4	
DX824-9.6(A)			32,800	9.6	40.		9.6	40.	46.2	
DX1030-4(A)	1000	30,000	13,650	4	16.7	2.1 ea. (2 motors)	4	16.7	19.2	4.1 ea. (2 motors)
DX1030-6(A)			20,450	6	25.0		6	25.0	N.A.	
DX1030-8(A)			27,300	8	33.3		8	33.3	38.4	
DX1030-9.6(A)			32,800	9.6	40		9.6	40	46.2	
DX1030-11.5(A)			39,300	11.5	47		11.5	47	N.A.	
DX1236-4(A)	1200	36,000	13,650	4	16.7	2.85 ea. (2 motors)	4	16.7	19.2	5.0 ea. (2 motors)
DX1236-6(A)			20,450	6	25.0		6	25.0	N.A.	
DX-1236-8(A)			27,300	8	33.3		8	33.3	38.4	
DX1236-9.6(A)			32,800	9.6	40		9.6	40	46.2	
DX1236-11.5(A)			39,300	11.5	47		11.5	47	N.A.	

NOTE On all 240V heaters derate BTU's 8% for 230V and 16% for 220V.

- (1) Cooling capacity depends on match with condensing unit, consult condensing unit manufacturer or First Co.
- (2) 240 volt motors wired with heater. Units through 8Kw can be wired on single 2 wire supply. 9.6Kw & 11.5Kw require two 2 wire supplies. (NEC unless prohibited by local codes.)
- (3) On DX Series specify heater voltage (240V or 208V).